

订货引导 超经济型 类别 系列 1 宽度 2 高度 3 厚度

E - A CT D - W3 - H2 - T1

请参考系列代码来选择型式和参数进行订购。

订货引导 超经济型 类别 系列 4 外径 3 厚度

E - A CT E - D8 - T2


请参考系列代码来选择型式和参数进行订购。

方形



代码	形状	磁力方向	材质	表面处理	耐热温度
E-ACTD	方形	轴向	钕磁铁	镀镍	80°C

公差

尺寸	公差
最短~10	±0.5
11~30	±1.0
大于30	±2.0

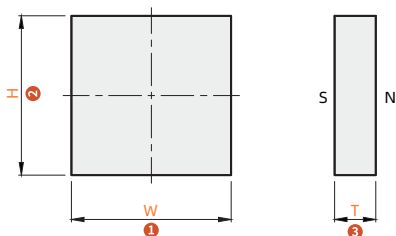

磁力方向:轴向



视角标准: 第一视角



型号		H 2												T 3																					
代码	W 1																																		
E-ACTD	3	2	3											1	2	3																			
	4	2	3	4											1	2	3	4																	
	5	2	3	4	5											1	2	3	4	5															
	6	2	3	4	5	6											1	2	3	4	5	6													
	8	2	3	4	5	6	8											1	2	3	4	5	6	8											
	10	2	3	4	5	6	8	10											1	2	3	4	5	6	8	10									
	15	2	3	4	5	6	8	10	15											1	2	3	4	5	6	8	10								
	20	2	3	4	5	6	8	10	15	20											1	2	3	4	5	6	8	10							
	30	2	3	4	5	6	8	10	15	20	30											1	2	3	4	5	6	8	10						
	40	2	3	4	5	6	8	10	15	20	30	40											1	2	3	4	5	6	8	10					
	50	2	3	4	5	6	8	10	15	20	30	40	50											1	2	3	4	5	6	8	10				
	60	2	3	4	5	6	8	10	15	20	30	40	50	60											1	2	3	4	5	6	8	10			

圆形


代码	形状	磁力方向	安装方式	材质	表面处理	耐热温度
E-ACTE	圆形	轴向	锥沉孔型	钕磁铁	镀镍	80°C

公差

尺寸	公差
最短~10	±0.5
11~30	±1.0
大于30	±2.0

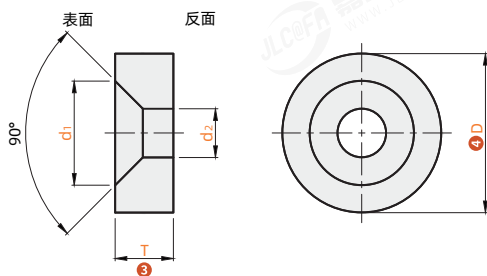

磁力方向:轴向



视角标准: 第一视角

型号		T 3																d ₂
代码	D 4																	
E-ACTE	8	3	4	5	6	8	10	12									3.2	
	10	3	4	5	6	8	10	12										
	12	3	4	5	6	8	10	12	15									
	15	3	4	5	6	8	10	12	15	18							4.3	
	18	3	4	5	6	8	10	12	15	18	20							
	20	3	4	5	6	8	10	12	15	18	20							
	25	3	4	5	6	8	10	12	15	18	20						5.3	
	30	3	4	5	6	8	10	12	15	18	20	25						
	35	3	4	5	6	8	10	12	15	18	20	25	30					
	40	3	4	5	6	8	10	12	15	18	20	25	30	35			6.3	
	45	3	4	5	6	8	10	12	15	18	20	25	30	35	40			
	50	3	4	5	6	8	10	12	15	18	20	25	30	35	40	45		