

ATHP - E1 - P G2 - D2 - L10


大类别 (A) 系列 (THP) 1 表面处理 (E1) 2 性价比 (P) 3 挂钩相对角度 (G2) 4 外径 (D2) 5 长度 (L10)

订货引导: 请参考系列代码来选择型式和参数进行订购。



代码	负载	性价比②	材质	表面处理①	挂钩相对角度③
ATHP-E1-PG1			SWP-A	发黑	90度
ATHP-W-PG1	轻载型	标准型	SUS304-WPB	-	
ATHP-E1-PG2			SWP-A	发黑	180度
ATHP-W-PG2			SUS304-WPB	-	



挂钩相对角度: 90度
ATHP-E1/W-PG1

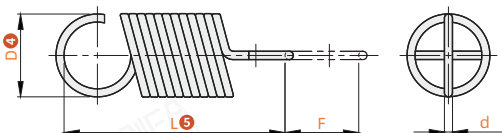

挂钩相对角度: 180度
ATHP-E1/W-PG2

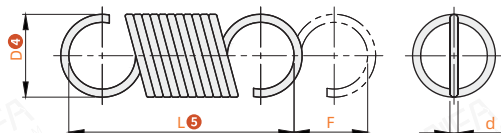

型号			线径 d	动态负载时		初始张力 (N)	弹簧常数 N/mm
代码	D④	L⑤		最大位移量 Fmax	最大载荷 N		
ATHP-E1-PG2 ATHP-W-PG2	2	10	0.25	5.7	1.86	0.34	0.25
		15		10.3			0.13
		20		14			0.09
		25		18.2			0.06
		30		22.1			0.05
	3	10	0.3	8.7	2.25	0.29	0.21
		15		16.6			0.10
		20		25			0.06
		25		33.3			0.04
		30		40			0.03
ATHP-E1-PG1 ATHP-W-PG1	4	15	0.4	10	3.24	0.59	0.24
		20		16.8			0.14
		25		22.5			0.10
		30		28.4			0.07
		35		33.7			0.06
ATHP-E1-PG2 ATHP-W-PG2	5	40	0.5	38.5	4.22	0.88	0.05
		15		6.8			0.47
		20		11.7			0.26
		25		17			0.18
		30		21.2			0.14
ATHP-E1-PG1 ATHP-W-PG1	6	35	0.6	26.1	8.14	1.27	0.11
		40		34			0.08
		45		37.7			0.07
		50		42.5			0.06
		20		14			0.47
ATHP-E1-PG2 ATHP-W-PG2	8	25	0.8	21.2	12.75	2.35	0.30
		30		28			0.23
		35		35			0.18
		40		41.1			0.15
		45		50			0.12
ATHP-E1-PG1 ATHP-W-PG1	10	50	1	53.8	15	3.73	0.11
		55		63.6			0.09
		60		70			0.08
		25		15.1			0.67
		30		21.2			0.47
ATHP-E1-PG2 ATHP-W-PG2	12	35	1.2	26.5			0.37
		40		33.1			0.29
		45		39.2			0.24
		50		46			0.21
		55		48.1			0.20
ATHP-E1-PG1 ATHP-W-PG1	14	60	1.4	53			0.18
		65		58.8			0.16
		70		66.2			0.14
		30		11.5			0.96
		35		15.3			0.72
ATHP-E1-PG2 ATHP-W-PG2	16	40	1.6	19.8			0.55
		45		23.9			0.45
		50		28.7			0.37
		55		32.8			0.32
		60		37			0.28
ATHP-E1-PG1 ATHP-W-PG1	18	65	1.8	39.6			0.27
		70		44.2			0.24
		75		47.9			0.22
		80		52.2			0.20
		90		60.5			0.17
ATHP-E1-PG2 ATHP-W-PG2	20	100	2	71.8			0.14
		105					
		110					
		115					
		120					

④ 初始张力和弹簧常数为参考值。负载[kgf]=负载N×0.101972