



订货引导

A T H S - P - D3 - L10

（大类）（系列）（类别）



① 性价比 ② 外径 ③ 长度

请参考系列代码来选择型式和参数进行订购。



来图定制

代码	负载	性价比①	材质	表面处理	挂钩相对角度
ATHS-P	中重载型	标准型	SWP-A	发黑	180度

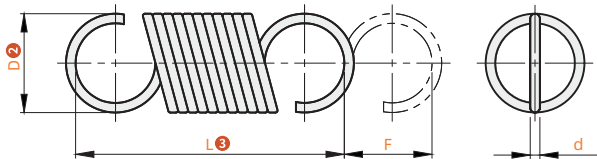

视角标准：第一视角

型号			线径 d	动态负载时		初始 张力 (N)	弹簧 常数 N/mm
代码	D②	L③		最大位移量 Fmax	最大载荷 N		
ATHS-P	3	10	0.45	2.2	6.47	1.57	2.24
		15		4.5			1.06
		20		6.7			0.72
		25		9.1			0.52
		30		11.4			0.41
	4	15	0.55	4.5	8.43	1.86	1.45
		20		7.1			0.91
		25		10			0.64
		30		12.6			0.50
		35		15.2			0.41
ATHS-P	5	40	0.7	18.1	14.71	2.45	0.34
		15		3.9			3.12
		20		6.9			1.75
		25		9.6			1.26
		30		12.5			0.96
	6	35	0.9	15.6	23.54	5.88	0.76
		40		19.2			0.62
		45		21.9			0.54
		50		25			0.47
		20		3.9			4.49
ATHS-P	6	25	0.9	6	23.54	5.88	2.92
		30		7.8			2.24
		35		10			1.75
		40		12			1.45
		45		13.8			1.26
	7	50	1.0	16.4	23.54	5.88	1.06
		55		18			0.96
		60		20			0.86
		20		3.9			4.49
		25		6			2.92

型号			线径 d	动态负载时		初始 张力 (N)	弹簧 常数 N/mm
代码	D②	L③		最大位移量 Fmax	最大载荷 N		
ATHS-P	8	25	1.1	5.8	31.38	6.86	4.21
		30		8.3			2.92
		35		10.9			2.24
		40		13.2			1.84
		45		15.6			1.55
	9	50	1.2	18.5	31.38	6.86	1.30
		55		21.7			1.11
		60		23.8			1.01
		65		26.3			0.91
		70		27.8			0.86
ATHS-P	10	30	1.4	6.5	49.03	12.75	5.56
		35		8.7			4.15
		40		10.7			3.37
		45		12.9			2.79
		50		15.2			2.37
	11	55	1.6	17.2	49.03	12.75	2.09
		60		19.5			1.84
		70		23.1			1.55
		80		27.4			1.30
		90		32.1			1.11
ATHS-P	12	100	1.8	46.2	83.36	23.54	0.77
		35		5			11.98
		40		7			8.53
		45		9			6.63
		50		11			5.42
	13	55	2.0	13	83.36	23.54	4.58
		60		14.5			4.11
		70		17.8			3.34
		80		21.3			2.79
		90		24.5			2.42

◎ 初始张力和弹簧常数为参考值。负载(kgf)=负载N×0.101972