




AMFE - 8
 (大类别) (系列) (类别) (规格)
 订货引导

请参考系列代码来选择型式和参数进行订购。

代码	材质	硬度(邵氏)	颜色	使用温度范围	用途
AMFE	丁腈橡胶	90HA±5	黑色	-20~100 °C	用在螺纹油口和螺杆端头

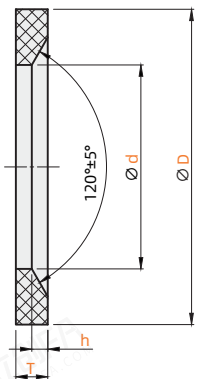

安装尺寸图

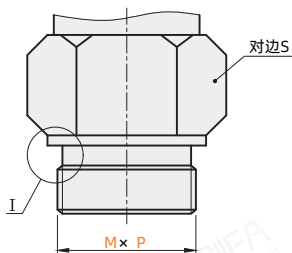

视角标准: 第一视角

型号		d	D	T	h	适用螺纹 M×P	d ₄	d ₃	V	S			
AMFE	8	6.4	9.9	1	0.5	M8×1	6.3	10	0.8	-			
	10	8.4	11.9			M10×1.5 & G1/8A	8.3	12		14			
	12	9.8	14.4			M12×1.5	9.7	14.5		17			
	14	11.6	16.5			M14×1.5 & G1/4A	11.5	16.6		1.3	19		
	16	13.8	18.9	1.5	0.8	M16×1.5	13.7	19	1.2	22			
	17	14.7	18.9			G3/8A	14.6						
	18	15.7	20.9			M18×1.5	15.6				21	1.3	24
	20	17.8	22.9			M20×1.5	17.7				23		
	21	18.5	23.9			G1/2A	18.4				24	1.2	27
	22	19.6	24.3			M22×1.5	19.5				24.4		
	24	21.8	26.9	2	1	M24×1.5 & G5/8A	21.7	27	1.3	-			
	26	23.9	29.2			M26×1.5 & G3/4A	23.8				29.3	32	
	42	38.8	45.8			M42×2 & G1-1/4A	38.6				46	1.7	50
	48	44.7	50.7			M48×2 & G1-1/2A	44.5				51	55	

密封圈