



AMFU - d4 - D10 - T4
 (大类别) (系列) (2) 外径 (1) 内径 (3) 厚度
 订货引导 (类别)
 请参考系列代码来选择型式和参数进行订购。

代码	材质	硬度(邵氏)	颜色	使用温度范围	使用压力	线速度	用途
AMFU	TPU	90HA±5	蓝色	-20~100℃	30MPa以下	0.03~0.5m/s	孔轴通用的滑动单向密封

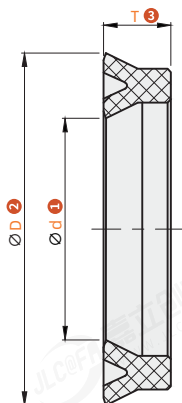

型号		D ²	T ³	H
AMFU	d ¹			
	4	10	4	4.5
		12		
	5	11	8	9
		12	5	6
	6	12	4	4.5
		6	7	
	8	12	5	6
		14	6	7
	9	19	6	7
		8	9	
		16	4	5
		6	7	
	10	18	5	6
		6	7	
		20	8	9
	11.2	19.2	5	6
		5	6	
	12	20	6	7
		8	9	
14	22			
16	24			
18	26			
20	28			
22	30	5	6	
22.4				
23.5	31.5			
24	32			
25	33			

型号		D ²	T ³	H
AMFU	d ¹			
	27	35	5	6
	28	36		
	30	40		
	31.5	41.5		
	32	42		
	35	45		
	35.5		6	7
	36	46		
	38	48		
	40	50		
		55		
		56	7	8
	50	60		
	53	63		
	55	65	6	7
	56	66		
	58	68		
	60	70		
		71	7	8
63	73			
65	75			
70	80	6	7	
75	85			
80	90			
85	100	10	11	
90	105	9	10	
95	110	10	11	
100	115	9	10	

密封圈