



工程塑料，活动式 | 推荐用于架空及滑行应用
工程塑料，固定式 | 推荐用于垂直悬挂和站立应用

宽度	产品代码：全套活动式接头		产品代码：全套固定式接头		A [mm]	B [mm]	齿数
	带梳状板	不带梳状板	带梳状板	不带梳状板			
015. °	14015.34PZ	-	14015.12PZ	-	-	28.5	2
020. °	14020.34PZ	-	14020.12PZ	-	-	33.5	2
025. °	14025.34PZ	-	14025.12PZ	-	13	38.5	2
038. °	14038.34PZ	-	14038.12PZ	-	24	51.5	4
050. °	14050.34PZ	-	14050.12PZ	-	36	63.5	5
068. °	14068.34PZ	-	14068.12PZ	-	54	81.5	7
080. °	14080.34PZ	-	14080.12PZ	-	66	93.5	8
100. °	14100.34PZ	-	14100.12PZ	-	86	113.5	10
125. °	14125.34PZ	-	14125.12PZ	-	111	138.5	13

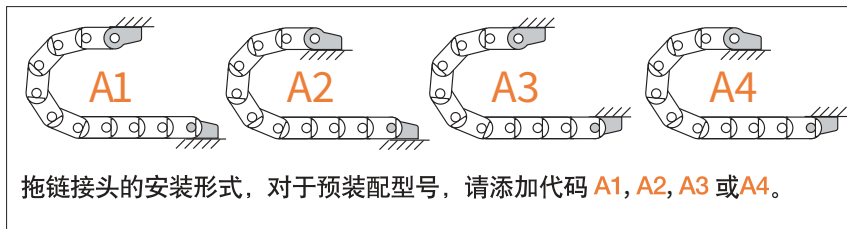

14038.34PZA1 订购示例

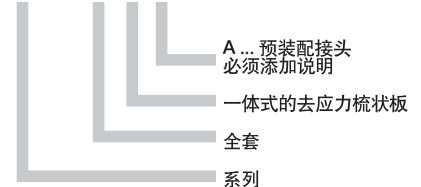

去应力元件，例如，电缆夹，梳状板，扎带和卡扣，常备库存。涵盖完整的chainfix订单选项
▶ 页码 1096