



工程塑料，活动式 | 推荐用于架空及滑行应用
工程塑料，固定式 | 推荐用于垂直悬挂和站立应用

宽度	产品代码：全套活动式接头		产品代码：全套固定式接头		A [mm]	齿数
	带梳状板	不带梳状板	带梳状板	不带梳状板		
050. °	3050.34PZB	3050.34PZ	3050.12PZB	3050.12PZ	28	5
075. °	3075.34PZB	3075.34PZ	3075.12PZB	3075.12PZ	53	7
100. °	3100.34PZB	3100.34PZ	3100.12PZB	3100.12PZ	78	10
115. °	3115.34PZB	3115.34PZ	3115.12PZB	3115.12PZ	93	11
125. °	3125.34PZB	3125.34PZ	3125.12PZB	3125.12PZ	103	12
150. °	3150.34PZB	3150.34PZ	3150.12PZB	3150.12PZ	128	15
175. °	3175.34PZB	3175.34PZ	3175.12PZB	3175.12PZ	153	17
200. °	3200.34PZB	3200.34PZ	3200.12PZB	3200.12PZ	178	20
225. °	3225.34PZB	3225.34PZ	3225.12PZB	3225.12PZ	203	22
250. °	3250.34PZB	3250.34PZ	3250.12PZB	3250.12PZ	228	25

全套带梳状板的接头，+10个电缆扎带，请添加参数K1，示例: 3250.34PZBK1

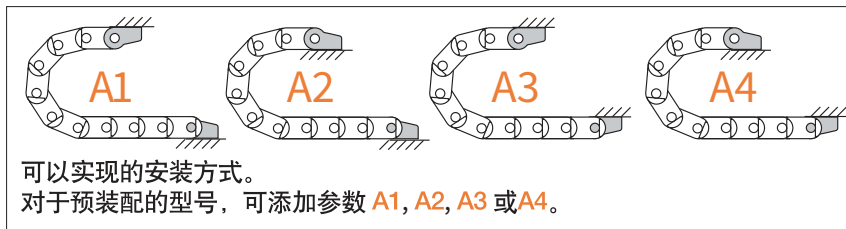

3075.34PZBA1 订购示例

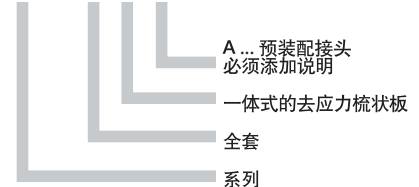

去应力元件，例如，电缆夹，梳状板，扎带和卡扣，常备库存。涵盖完整的chainfix 订单选项
▶ 页码 1096