





6700ZZ

订货引导

型号

请参考系列代码来选择型式和参数进行订购。

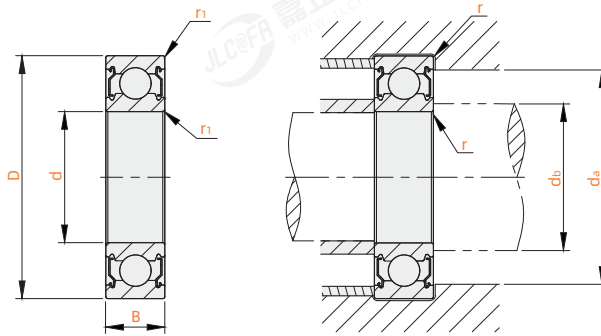

视角标准：第一视角

型号	d	D	B	r1 (Min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量g (参考)
					Cr(动) KN	Cor(静) KN		db(Min.)	db(Max.)	da(Max.)	r(Max.)	
6700ZZ	10	15	4	0.2	0.85	0.43	15000	10.4	11.21	14.2	0.2	2
6800ZZ		19	5		1.83	0.925	34000		12.5	17		5
6900ZZ		22	6	0.3	2.7	1.27	32000	12	13	20	0.3	9
6000ZZ		26	8		4.55	1.96	30000		13.5	24		19
6200ZZ		30	9	0.6	5.1	2.39	24000	14	16	26	0.6	32
6300ZZ	12	35	11		8.1	3.45	21000		16.5	31		52
6701ZZ		18	4	0.2	0.92	0.53	13000	12.4	13.86	16.7	0.2	3
6801ZZ		21	5		1.92	1.04	32000		14.5	19		6
6901ZZ		24	6	0.3	2.89	1.46	30000	14	15	22	0.3	11
6001ZZ		28	8		5.1	2.39	27000		16	26		21
6201ZZ	15	32	10	0.6	6.1	2.75	22000	16	17	28	0.6	37
6301ZZ		37	12	1.0	9.7	4.2	19000	17	18	32	1.0	60
6702ZZ		21	4	0.2	0.93	0.58	10000	15.4	16.86	19.7	0.2	4
6802ZZ		24	5		2.08	1.26	27000		17.5	22		7
6902ZZ		28	7	0.3	3.65	2	26000	17		26	0.3	16
6002ZZ	17	32	9		5.6	2.83	23000		19	30		30
6202ZZ		35	11	0.6	7.75	3.6	19000	19	20	31	0.6	45
6302ZZ		42	13	1.0	11.4	5.45	17000	20	22.5	37	1.0	83
6703ZZ		23	4	0.2	1	0.65	9500	17.4	18.86	21.1	0.2	4
6803ZZ		26	5		2.23	1.46	25000		19.5	24		8
6903ZZ	20	30	7	0.3	4.65	2.58	23000	19	20	28	0.3	18
6003ZZ		35	10		6.8	3.35	20000		21	33		39
6203ZZ		40	12	0.6	9.6	4.6	17000	21	23	36	0.6	66
6303ZZ		47	14	1.0	13.6	6.65	15000	22	25.5	42	1.0	113
6704ZZ		27	4	0.2	1.4	0.72	8500	20.4	22.36	25.5	0.2	6
6804ZZ	25	32	7	0.3	4	2.47	20000	22	22.5	30	0.3	19
6904ZZ		37	9		6.4	3.7	19000		24	35		36
6004ZZ		42	12	0.6	9.4	5.05	17000	24	26	38	0.6	69
6204ZZ		47	14	1.0	12.8	6.65	14000	25	28	42	1.0	106
6304ZZ		52	15	1.1	15.9	7.9	13000	26.5	28	45.5	1.1	145
6805ZZ	30	37	9	0.3	4.3	2.95	18000	27	28	35	0.3	22
6905ZZ		42	9		7.05	4.55	16000		29	40		42
6005ZZ		47	12	0.6	10.1	5.85	15000	29	30.5	43	0.6	80
6205ZZ		52	15	1.0	14	7.85	12000	30	32	47	1.0	128
6305ZZ		62	17	1.1	20.6	11.2	11000	31.5	36	55.5	1.1	235
6806ZZ	35	42	7	0.3	4.7	3.65	15000		33	40	0.3	26
6906ZZ		47	9		7.25	5	14000	32	34	45		48
6006ZZ		55	13	1.0	13.2	8.3	12000		37	50		116
6206ZZ		62	16		19.5	11.3	10000	35	39	57	1.0	199
6306ZZ		72	19	1.1	26.7	15	9200	36.5	42.5	65.5	1.1	345
6807ZZ	40	47	7	0.3	4.9	4.05	13000	37	38	45	0.3	29
6907ZZ		55	10	0.6	9.55	6.85	12000	39	40	51	0.6	74
6007ZZ		62	14	1.0	16	10.3	11000	40	42	57	1.0	155
6207ZZ		72	17	1.1	25.7	15.3	9000	41.5	45	65.5	1.1	288
6307ZZ		80	21	1.5	33.5	19.2	8400	43	47	72	1.5	469
6808ZZ	45	52	7	0.3	5.1	4.4	12000	42	43	50	0.3	33
6908ZZ		62	12	0.6	12.2	8.9	11000	44	45	58	0.6	110
6008ZZ		68	15	1.0	16.8	11.5	9500	45	47	63	1.0	190
6208ZZ		80	18	1.1	29.1	17.8	8200	46.5	51	73.5	1.1	366
6308ZZ		90	23	1.5	40.5	24	7500	48	53	82	1.5	636
6809ZZ	50	58	7	0.3	6.18	5.38	11000	47	47.5	56	0.3	38
6909ZZ		68	12	0.6	14.1	10.8	9500	49	50	64	0.6	126
6009ZZ		75	16	1.0	20.9	15.2	8800	50	53.5	70	1.0	241
6209ZZ		85	19	1.1	31.5	20.4	7500	51.5	55.5	78.5	1.1	420
6309ZZ		100	25	1.5	53	32	6700	53	61.5	92	1.5	829
6810ZZ		65	7	0.3	6.6	6.09	9500	52	52.5	63	0.3	50
6910ZZ		72	12	0.6	14.5	11.7	9000	54	55	68	0.6	135
6010ZZ		80	16	1.0	21.8	16.6	8300	55.0	57.5	75	1.0	261
6210ZZ		90	20	1.1	35	23.2	7000	56.5	60	83.5	1.1	454
6310ZZ		110	27	2.0	62	38	6000	59	68	101	2.0	1006

公差

1Kg=9.81N

内径d(mm)				内径公差(P6/um)				外径D(mm)				外径公差(P6/um)			
超过	到	上偏差	下偏差	超过	到	上偏差	下偏差	超过	到	上偏差	下偏差	超过	到	上偏差	下偏差
0.6	2.5	0	-7	30	50	0	-10	2.5	6	0	-7	80	120	0	-13
2.5	10	0	-7	50	80	0	-12	6	18	0	-7	120	150	0	-15
10	18	0	-7	80	120	0	-15	18	30	0	-8	150	180	0	-18
18	30	0	-8	120	180	0	-18	30	50	0	-9	180	250	0	-20
								50	80	0	-11	250	315	0	-25