





S6700ZZ

订货号

型号

请参考系列代码来选择型式和参数进行订购。

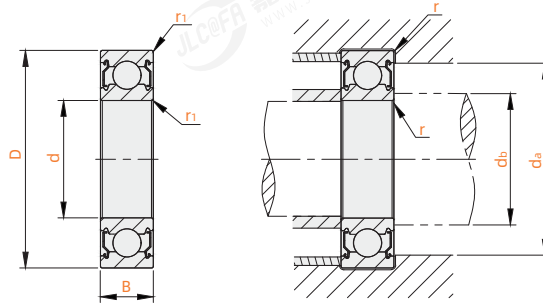

视角标准：第一视角

型号	d	D	B	r1 (Min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量g (参考)
					Cr(动) KN	Cor(静) KN		da(Min.)	da(Max.)	da(Max.)	r(Max.)	
S6700ZZ	10	15	4	0.2	0.85	0.43	15000	10.4	11.21	14.2	0.2	2
S6800ZZ		19	5	0.3	1.83	0.925	34000	12	12.5	17	0.3	5
S6900ZZ		22	6		2.7	1.27	32000		13	20		9
S6000ZZ		26	8	0.6	4.55	1.96	30000	14	13.5	24	0.6	19
S6200ZZ	12	30	9		5.1	2.39	24000		16	26		32
S6300ZZ		35	11	0.2	8.1	3.45	21000	12.4	16.5	31	0.2	52
S6701ZZ		18	4		0.92	0.53	13000		13.86	16.7		3
S6801ZZ		21	5	0.3	1.92	1.04	32000	14	14.5	19	0.3	6
S6901ZZ	15	24	6		2.89	1.46	30000		15	22		11
S6001ZZ		28	8	0.6	5.1	2.39	27000	16	16	26	0.6	21
S6201ZZ		32	10		6.1	2.75	22000		17	28		37
S6301ZZ		37	12	1.0	9.7	4.2	19000	17	18	32	1.0	60
S6702ZZ	17	21	4	0.2	0.93	0.58	10000	15.4	16.86	19.7	0.2	4
S6802ZZ		24	5	0.3	2.08	1.26	27000	17	17.5	22	0.3	7
S6902ZZ		28	7		3.65	2	26000		19	26		16
S6002ZZ		32	9	0.6	7.5	2.83	23000	19	20	30	0.6	30
S6202ZZ	20	35	11		7.75	3.6	19000		22.5	37		45
S6302ZZ		42	13	1.0	11.4	5.45	17000	20	22.5	37	1.0	83
S6703ZZ		23	4	0.2	1	0.65	9500	17.4	18.86	21.1	0.2	4
S6803ZZ		26	5	0.3	2.23	1.46	25000	19	19.5	24	0.3	8
S6903ZZ	25	30	7		4.65	2.58	23000		20	28		18
S6003ZZ		35	10	0.6	6.8	3.35	20000	21	21	33	0.6	39
S6203ZZ		40	12		9.6	4.6	17000		23	36		66
S6303ZZ		47	14	1.0	13.6	6.65	15000	22	25.5	42	1.0	113
S6704ZZ	30	27	4	0.2	1.4	0.72	8500	20.4	22.36	25.5	0.2	6
S6804ZZ		32	7	0.3	4	2.47	20000	22	22.5	30	0.3	19
S6904ZZ		37	9		6.4	3.7	19000		24	35		36
S6004ZZ		42	12	0.6	9.4	5.05	17000	24	26	38	0.6	69
S6204ZZ	35	47	14	1.0	12.8	6.65	14000	25	28	42	1.0	106
S6304ZZ		52	15	1.1	15.9	7.9	13000	26.5	28	45.5	1.1	145
S6805ZZ		37	7	0.3	4.3	2.95	18000	27	28	35	0.3	22
S6905ZZ		42	9		7.05	4.55	16000		29	40		42
S6005ZZ	40	47	12	0.6	10.1	5.85	15000	29	30.5	43	0.6	80
S6205ZZ		52	15	1.0	14	7.85	12000	30	32	47	1.0	128
S6305ZZ		62	17	1.1	20.6	11.2	11000	31.5	36	55.5	1.1	235
S6806ZZ		42	7	0.3	4.7	3.65	15000	32	33	40	0.3	26
S6906ZZ	45	47	9		7.25	5	14000		34	45		48
S6006ZZ		55	13	1.0	13.2	8.3	12000	35	37	50	1.0	116
S6206ZZ		62	16		19.5	11.3	10000		39	57		199
S6306ZZ		72	19	1.1	26.7	15	9200	36.5	42.5	65.5	1.1	345
S6807ZZ	50	47	7	0.3	4.9	4.05	13000	37	38	45	0.3	29
S6907ZZ		55	10	0.6	9.55	6.85	12000	39	40	51	0.6	74
S6007ZZ		62	14	1.0	16	10.3	11000	40	42	57	1.0	155
S6207ZZ		72	17	1.1	25.7	15.3	9000	41.5	45	65.5	1.1	288
S6307ZZ	40	80	21	1.5	33.5	19.2	8400	43	47	72	1.5	469
S6808ZZ		52	7	0.3	5.1	4.4	12000	42	43	50	0.3	33
S6908ZZ		62	12	0.6	12.2	8.9	11000	44	45	58	0.6	110
S6008ZZ		68	15	1.0	16.8	11.5	9500	45	47	63	1.0	190
S6208ZZ	50	80	18	1.1	29.1	17.8	8200	46.5	51	73.5	1.1	366
S6308ZZ		90	23	1.5	40.5	24	7500	48	53	82	1.5	636
S6809ZZ		58	7	0.3	6.18	5.38	11000	47	47.5	56	0.3	38
S6909ZZ		68	12	0.6	14.1	10.8	9500	49	50	64	0.6	126
S6009ZZ	55	75	16	1.0	20.9	15.2	8800	50	53.5	70	1.0	241
S6209ZZ		85	19	1.1	31.5	20.4	7500	51.5	55.5	78.5	1.1	420
S6309ZZ		100	25	1.5	53	32	6700	53	61.5	92	1.5	829
S6810ZZ		65	7	0.3	6.6	6.09	9500	52	52.5	63	0.3	50
S6910ZZ	60	72	12	0.6	14.5	11.7	9000	54	55	68	0.6	135
S6010ZZ		80	16	1.0	21.8	16.6	8300	55.0	57.5	75	1.0	261
S6210ZZ		90	20	1.1	35	23.2	7000	56.5	60	83.5	1.1	454
S6310ZZ		110	27	2.0	62	38	6000	59	68	101	2.0	1006

公差

1Kg=9.81N

内径d(mm)		内径公差(P6/um)	
超过	到	上偏差	下偏差
0.6	2.5	0	-7
2.5	10	0	-7
10	18	0	-7
18	30	0	-8

内径d(mm)		内径公差(P6/um)	
超过	到	上偏差	下偏差
30	50	0	-10
50	80	0	-12
80	120	0	-15
120	180	0	-18

外径D(mm)		外径公差(P6/um)	
超过	到	上偏差	下偏差
2.5	6	0	-7
6	18	0	-7
18	30	0	-8
30	50	0	-9
50	80	0	-11

外径D(mm)		外径公差(P6/um)	
超过	到	上偏差	下偏差
80	120	0	-13
120	150	0	-15
150	180	0	-18
180	250	0	-20
250	315	0	-25