



SI5T/K - R

1 轴承规格



2 螺纹旋向

订货引导

请参考系列代码来选择型式和参数进行订购。

内螺纹

系列	安装方式	功能	杆端		衬垫	内圈	
			材质	表面处理	材质	材质	热处理
SI...T/K SSI...T/K	内螺纹型	外圈滑动表面带保护层	碳钢 SUS304	镀环保白锌 -	铜 SUS304	轴承钢 SUS304	淬火


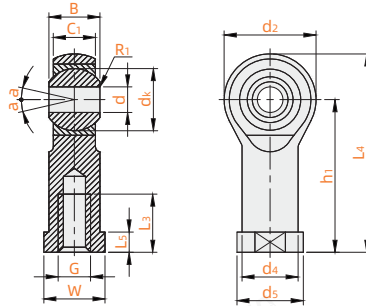


视角标准：第一视角

型号		螺纹 旋向 ②	d	B	d _k	C ₁ (Max.)	d ₂ (Max.)	G (6H)	h ₁	L ₃ (Min.)	L ₄ (Max.)	L ₅	W	d ₄	d ₅	R ₁ (Min.)	a°≈	额定负荷(KN)		重量 (kg)			
轴承规格 ①	动负荷																	静负荷					
SI5T/K	SSI5T/K	R (右旋)	5	8	11.11	6	18	M5×0.8	27	10	36	4	9	8.5	11	0.3	13	4.6	4.8	0.016			
SI6T/K	SSI6T/K		6	9	12.7	6.75	20	M6×1.0	30	12	40		11	10	13			6.1	6.5	0.022			
SI8T/K	SSI8T/K		8	12	15.875	9	24	M8×1.25	36	16	48	5	14	12.5	16			8.5	9.5	0.047			
SI10T/K	SSI10T/K		L (左旋)	10	14	19.05	10.5	28	M10×1.5	43	20	57	6.5	17	15	19	0.6	13	9.7	12	0.077		
SI10T/K-1	SSI10T/K-1																						
SI12T/K	SSI12T/K			12	16	22.225	12	32	M12×1.75	50	22	66			19	17.5			22	10.6	15	0.100	
SI12T/K-1	SSI12T/K-1																						
SI14T/K	SSI14T/K		14	19	25.4	13.5	36	M14×2.0	57	25	75	8	22	20	25	0.6	15	17	22	0.160			
SI14T/K-1	SSI14T/K-1																						
SI16T/K	SSI16T/K		16	21	28.575	15	42	M16×2.0	64	28	85				22			27	19.7	27	0.220		
SI16T/K-1	SSI16T/K-1																						
SI18T/K	SSI18T/K	18	23	31.75	16.5	44	M18×1.5	71	32	93	10	27	25	31	0.6	14	31.3	35	0.320				
SI20T/K	SSI20T/K	20	25	34.925	18	50	M20×1.5	77	33	102				30			27.5	34	29.8	40	0.420		
SI22T/K	SSI22T/K	22	28	38.1	20	54	M22×1.5	84	37	111				32			30	38	40.2	48	0.488		
SI25T/K	SSI25T/K	25	31	42.86	22	60	M24×2.0	94	42	124	12	36	33.5	42	0.6	15	44	55	0.540				
SI28T/K	SSI28T/K	28	35	47.63	24	66	M27×2.0	103		136			14				37	46	52.2	65	0.720		
SI30T/K	SSI30T/K	30	37	50.8	25	70	M30×2.0	110	51	145			15	41			40	50	60.2	78	0.820		
SI30T/K-1	SSI30T/K-1						M27×2.0												1.100				
SI35T/K	SSI35T/K	35	43	57.15	28	81	M36×2.0	125	56	165.5	17	50	46	58	1.0	16	-	-	1.600				
SI40T/K	SSI40T/K	40	49	66.67	33	91	M42×2.0	142	60	187.5	19	55	53	65			17	-	-	2.400			
SI50T/K	SSI50T/K	50	60	82.5	45	117	M48×2.0	160	65	218.5	23	65	65	75			12	-	-	5.000			

外螺纹

系列	安装方式	功能	杆端		衬垫	内圈	
			材质	表面处理	材质	材质	热处理
SA...T/K SSA...T/K	外螺纹型	外圈滑动表面带保护层	碳钢 SUS304	镀环保白锌 -	铜 SUS304	轴承钢 SUS304	淬火

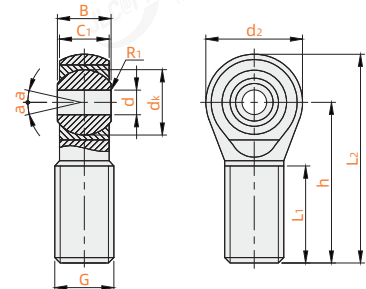

视角标准：第一视角

型号 轴承规格 ①		螺纹 旋向 ②	d	B	d _k	C ₁ (Max.)	d ₂ (Max.)	G (6H)	h	L ₁ (Min.)	L ₂ (Max.)	R ₁ (Min.)	a°≈	额定负荷(KN)		重量 (kg)	
														动负荷	静负荷		
SA5T/K	SSA5T/K	R (右旋)	5	8	11.11	6	18	M5×0.8	33	19	42	0.3	13	4.4	4.6	0.013	
SA6T/K	SSA6T/K		6	9	12.7	6.75	20	M6×1.0	36	21	46		14	4.5	4.8	0.015	
SA8T/K	SSA8T/K		8	12	15.875	9	24	M8×1.25	42	25	54		14	5.8	6.5	0.034	
SA10T/K	SSA10T/K		10	14	19.05	10.5	28	M10×1.5	48	28	62		13	9.7	12	0.071	
SA12T/K	SSA12T/K		12	16	22.225	12	32	M12×1.75	54	32	70	0.6	13	10.6	15	0.11	
SA14T/K	SSA14T/K		14	19	25.4	13.5	36	M14×2.0	60	36	78		16	17	22	0.13	
SA16T/K	SSA16T/K		16	21	28.575	15	42	M16×2.0	66	37	87		0.6	15	19.7	27	0.22
SA16T/K-1	SSA16T/K-1							M16×1.5									
SA18T/K	SSA18T/K		18	23	31.75	16.5	44	M18×1.5	72	41	94	0.6		14	31.3	35	0.29
SA20T/K	SSA20T/K		20	25	34.925	18	50	M20×1.5	78	45	103					29.8	40
SA22T/K	SSA22T/K	22	28	38.1	20	54	M22×1.5	84	48	111	15		14	40.2	48	0.49	
SA25T/K	SSA25T/K	25	31	42.86	22	60	M24×2.0	94	55	124					44	55	0.65
SA28T/K	SSA28T/K	28	35	47.63	24	66	M27×2.0	103	62	136		1.0	15	52.2	65	0.87	
SA30T/K	SSA30T/K	30	37	50.8	25	70	M30×2.0	107	66	145			17	60.2	78	1.1	
SA35T/K	SSA35T/K	35	43	57.1	28	81	M36×2.0	125	85	180.5	16				1.64		
SA40T/K	SSA40T/K	40	49	66.6	33	91	M42×2.0	142	90	195.5	17		-	-	2.4		
SA50T/K	SSA50T/K		50	60	82.5	45	117	M48×2.0	160	105	243.5	12			4.8		