




E AB A - S2 W - M3 L6  
大类别 系列 2 表面处理 4 长度  
(类别) 1 主体材质 3 规格

订货引导  
请参考系列代码来选择型式和参数进行订购。

| 代码       | 类型  |           | 螺纹 | 主体材质 <sup>①</sup> | 表面处理 <sup>②</sup> | 强度等级  |
|----------|-----|-----------|----|-------------------|-------------------|-------|
| EABA-E1  | 组合型 | 带平垫圈、弹簧垫圈 | 粗牙 | ML40Cr            | 发黑                | 12.9  |
| EABA-W   |     |           |    | SUS304            | -                 | A2-70 |
| EABA-S2W |     |           |    | SUS316            | -                 | A4-70 |

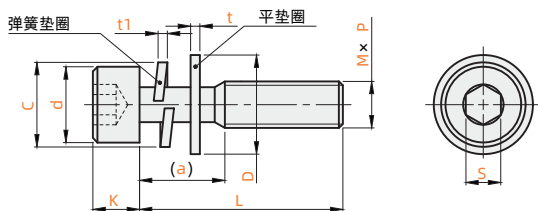

视角标准：第一视角

## ML40Cr

| 型号      |     | L 4 |   |    |    |    |    |    |    |    |     | P<br>螺距 | d    | K    | t <sub>1</sub> | S    | t   | C   | D    | a    |     |      |
|---------|-----|-----|---|----|----|----|----|----|----|----|-----|---------|------|------|----------------|------|-----|-----|------|------|-----|------|
| 代码      | M 3 |     |   |    |    |    |    |    |    |    |     |         |      |      |                |      |     |     |      |      |     |      |
| EABA-E1 | 3   | 6   | 8 | 10 | 12 |    |    |    |    |    | 0.5 | 5.5     | 3    | 0.9  | 2.5            | 0.55 | 5.5 | 7   | 3    |      |     |      |
|         | 4   | 6   | 8 | 10 | 12 | 14 | 16 |    |    |    |     |         | 0.7  | 7    | 4              | 1.2  | 3   | 0.9 | 7    | 9    | 4.4 |      |
|         | 5   | 8   |   |    | 10 | 12 | 14 | 16 | 20 | 22 | 25  | 0.8     | 8.5  | 5    | 1.4            | 4    | 1.1 | 8.5 | 10   | 5.4  |     |      |
|         | 6   | 10  |   |    | 12 | 14 | 16 | 18 | 20 | 22 | 25  | 30      | 1.0  | 10   | 6              | 1.7  | 5   | 1.8 | 11.5 | 12.5 | 6.9 |      |
|         | 8   | 12  |   |    | 14 | 16 | 18 | 20 | 22 | 25 | 30  | 35      | 1.25 | 13   | 8              | 2.1  | 6   |     | 14.5 | 17   | 8.4 |      |
|         | 10  |     |   |    | 20 |    |    | 25 | 30 | 35 | 40  | 45      | 50   | 1.5  | 16             | 10   | 2.2 | 6   | 2    | 18   | 21  | 10   |
|         | 12  |     |   |    | 20 |    |    | 25 | 30 | 35 | 40  | 45      | 50   | 1.75 | 18             | 12   | 2.5 | 10  | 2.5  | 21   | 25  | 11.7 |

## SUS304

| 型号     |                | L <sup>④</sup>                        |  |  |  |  |  | P<br>螺距 | d   | K  | t <sub>1</sub> | S   | t    | C    | D    | a   |
|--------|----------------|---------------------------------------|--|--|--|--|--|---------|-----|----|----------------|-----|------|------|------|-----|
| 代码     | M <sup>③</sup> |                                       |  |  |  |  |  |         |     |    |                |     |      |      |      |     |
| EABA-W | 3              | 6 8 10 12 14 16 20                    |  |  |  |  |  | 0.5     | 5.5 | 3  | 0.9            | 2.5 | 0.55 | 5.5  | 7    | 3   |
|        | 4              | 6 8 10 12 14 16 18 20 25 30 35        |  |  |  |  |  | 0.7     | 7   | 4  | 1.2            | 3   | 0.9  | 7    | 9    | 4.4 |
|        | 5              | 8 10 12 14 16 18 20 25 30 35 40 45 50 |  |  |  |  |  | 0.8     | 8.5 | 5  | 1.4            | 4   | 1.1  | 8.5  | 10   | 5.4 |
|        | 6              | 10 12 14 16 18 20 25 30 35 40 45 50   |  |  |  |  |  | 1.0     | 10  | 6  | 1.7            | 5   | 1.8  | 11.5 | 12.5 | 6.9 |
|        | 8              | 12 16 20 25 30 35 40 45 50            |  |  |  |  |  | 1.25    | 13  | 8  | 2.1            | 6   |      | 14.5 | 17   | 8.4 |
|        | 10             | 16 20 25 30 35 40 60                  |  |  |  |  |  | 1.5     | 16  | 10 | 2.2            | 6   | 2    | 18   | 21   | 10  |

## SUS316

| 型号       |                | L <sup>④</sup>                           | P<br>螺距 | D    | K  | S   | t <sub>1</sub> | d   | t    | a   | c    |
|----------|----------------|------------------------------------------|---------|------|----|-----|----------------|-----|------|-----|------|
| 代码       | M <sup>③</sup> |                                          |         |      |    |     |                |     |      |     |      |
| EABA-S2W | 3              | 6 8 10 12 14 16 18 20 22 25 30           | 0.5     | 7    | 3  | 2.5 | 0.9            | 5.5 | 0.55 | 3   | 5.5  |
|          | 4              | 6 8 10 12 14 16 18 20 22 25 30 35 40     | 0.7     | 9    | 4  | 3   | 1.2            | 7   | 0.9  | 4.4 | 7    |
|          | 5              | 8 10 12 14 16 18 20 22 25 30 35 40 45 50 | 0.8     | 10   | 5  | 4   | 1.4            | 8.5 | 1.1  | 5.4 | 8.5  |
|          | 6              | 10 12 14 16 18 20 22 25 30 35 40 45 50   | 1.0     | 12.5 | 6  | 5   | 1.7            | 10  | 1.8  | 6.9 | 11.5 |
|          | 8              | 12 14 16 18 20 22 25 30 35 40 45 50      | 1.25    | 17   | 8  | 6   | 2.1            | 13  |      | 8.4 | 14.5 |
|          | 10             | 18 20 22 25 30 35 40 45 50               | 1.5     | 21   | 10 | 6   | 2.2            | 16  | 2    | 10  | 18   |

组合件