



订货引导

A T K E - PD10 - L30



(大类别) (系列) (类别) (1) 装配直径 (2) 长度

请参考系列代码来选择型式和参数进行订购。

代码	基准孔	性价比	材质	表面处理
ATKE	滚珠滑套用	标准型	SWP-B	发黑



两端均未进行磨削加工。

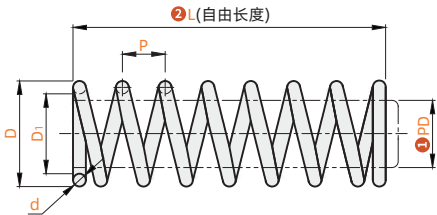

型号		D	D ₁	d	P	压紧长度	弹簧常数 N/mm
代码	PD ① L ②						
ATKE	30					4.8	15.98
	35					5.4	13.98
	40					6.0	11.98
	45					6.6	10.98
	50					7.2	
	10 55	11.7	10.5	0.6	5	7.8	8.98
	60					8.4	7.98
	65					9.0	
	70					9.6	6.98
	75					10.2	
	80					10.8	5.98
	30					4.9	16.98
	35					5.4	14.98
	40					6.1	12.98
	45					6.6	10.98
	50					7.2	9.98
	13 55	14.9	13.5	0.7	6	7.8	8.98
	60					8.4	7.98
	65					8.9	7.98
	70					9.6	6.98
	75					10.1	6.98
	80					10.7	5.98
	30					3.2	31.98
	35					3.4	25.98
	40					3.7	22.98
	16 45	18.3	16.5	0.8	12	4.0	21.98
	50					4.2	19.98
	55					4.5	18.98
	60					4.8	15.98

型号		D	D ₁	d	P	压紧长度	弹簧常数 N/mm
代码	PD ① L ②						
ATKE	65					5.0	14.98
	70					5.3	13.98
	75					5.6	12.98
	16 80	18.3	16.5	0.8	12	5.8	11.98
	85					6.1	11.98
	90					6.4	10.98
	35					4.7	39.98
	40					5.0	34.98
	45					5.3	30.98
	50					5.6	27.98
	55					5.8	25.98
	20 60	22.5	20.5	1	14	6.0	22.98
	65					6.5	21.98
	70					7.0	19.98
	75					7.4	18.98
	80					7.7	17.98
	85					8.1	15.98
	90					8.5	14.98
	40					6.0	37.98
	45					6.3	33.98
	50					6.6	29.98
	55					7.0	27.98
	60					7.4	24.98
	25 65	27.9	25.5	1.2	14	7.9	23.98
	70					8.4	21.98
	75					8.7	19.98
	80					9.0	18.98
	85					9.3	17.98
	90					9.6	16.98