


A YH B - E1 - d1.5 - D4.0 - L10.0 - CD2.5  
 订货引导 (大类别) (系列) (1) 表面处理 (2) 内径 (3) 外径 (4) 总长度 (5) 可选加工  
 请参考系列代码来选择型式和参数进行订购。


代码	精度等级	尺寸特征	材质	表面处理 ①
AYHB-E1			S45C	发黑
AYHB-N1	普通级	尺寸指定		无电解镀镍
AYHB-W				SUS304



如防锈有要求, 请优先选用不锈钢材质或无电解镀镍产品。

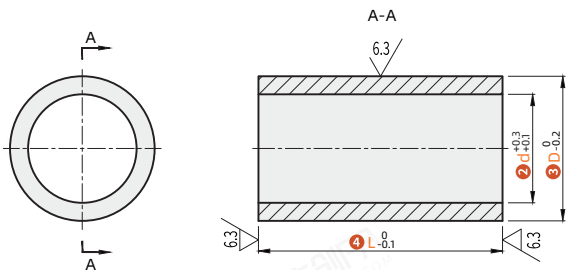

其余  $\sqrt{6.3}$



型号 代码	d ② (选择)	D ③ 最小单位 0.5	L ④ 最小单位 0.1
AYHB-E1	1.5	4.0~10.0	10.0~100
AYHB-N1	2.0	10.5~20.0	
AYHB-W	2.6	20.5~30	
	(最小单位 0.5)	30.5~40	
	3.0~100	40.5~50	
		50.5~60	
		60.5~80	
		80.5~100	

⑤ 可选加工

代码 ⑤	可选图示	选型方法																																								
CC() CD()	增加倒角 C 	CD2.5 ● CC 最小单位 0.5 ● CD 最小单位 0.5																																								
MA() (粗牙) MB() (细牙)	变更内孔为螺孔 	MA4 ● 螺距表 <table border="1"> <thead> <tr> <th>螺纹直径 MA/MB</th> <th>MA 螺距(粗牙)</th> <th>MB 螺距(细牙)</th> <th>L max</th> </tr> </thead> <tbody> <tr><td>4</td><td>0.7</td><td></td><td>20</td></tr> <tr><td>5</td><td>0.8</td><td>0.5</td><td>30</td></tr> <tr><td>6</td><td>1.0</td><td></td><td>35</td></tr> <tr><td>8</td><td>1.25</td><td>0.75</td><td>40</td></tr> <tr><td>10</td><td>1.5</td><td></td><td>50</td></tr> <tr><td>12</td><td>1.75</td><td>1.0</td><td>55</td></tr> <tr><td>16</td><td>2.0</td><td></td><td>90</td></tr> <tr><td>18</td><td>-</td><td></td><td></td></tr> <tr><td>20</td><td>2.5</td><td>1.5</td><td>100</td></tr> </tbody> </table>	螺纹直径 MA/MB	MA 螺距(粗牙)	MB 螺距(细牙)	L max	4	0.7		20	5	0.8	0.5	30	6	1.0		35	8	1.25	0.75	40	10	1.5		50	12	1.75	1.0	55	16	2.0		90	18	-			20	2.5	1.5	100
螺纹直径 MA/MB	MA 螺距(粗牙)	MB 螺距(细牙)	L max																																							
4	0.7		20																																							
5	0.8	0.5	30																																							
6	1.0		35																																							
8	1.25	0.75	40																																							
10	1.5		50																																							
12	1.75	1.0	55																																							
16	2.0		90																																							
18	-																																									
20	2.5	1.5	100																																							
KA (1孔) KB (2孔)	增加径向紧固用螺孔 单螺孔 KA()  双螺孔 KB() 	KA3 KB5 ● KA/KB 依据下表选择: <table border="1"> <thead> <tr> <th>KA/KB</th> <th>壁厚</th> </tr> </thead> <tbody> <tr><td>3-4</td><td>3以上</td></tr> <tr><td>5-6-8</td><td>5以上</td></tr> <tr><td>10-12</td><td>8以上</td></tr> </tbody> </table>	KA/KB	壁厚	3-4	3以上	5-6-8	5以上	10-12	8以上																																
KA/KB	壁厚																																									
3-4	3以上																																									
5-6-8	5以上																																									
10-12	8以上																																									

代码 ⑤	可选图示	选型方法
Vd	变更内径 d 公差 	Vd ● $d_{+0.3}$ 公差变更为 $d_{H7}$ ● 当 L 长度过长时, 孔中间带有退刀槽 
Dg (g6) Dh (h7)	变更外径 D 公差 	Dg 或 Dh ● 外径公差变更为 g6 或 h7

轴环 / 金属垫圈 / 垫片