



UCT - FSB - 201

大类别

1 规格


品牌

订货引导


请参考系列代码来选择型式和参数进行订购。

铸造型-经济型

代码	类型	材质	
		轴承座	轴承
UCT...-FSB	经济型	HT200灰铸铁	轴承钢

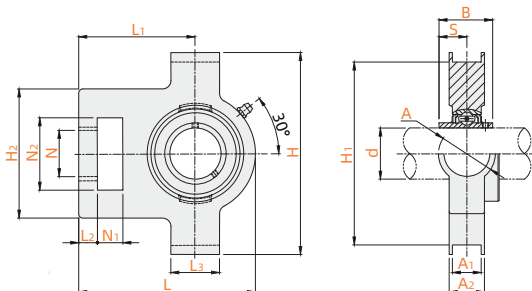

精度: JIS B 1558
JIS B 1514
JIS B 1559
(GB/T 7809-1995)




视角标准: 第一视角


型号		国标型号	d	N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A	A ₂	L ₁	B	S	安装孔尺寸(Δ)公差	安装孔位置度偏差x	基本额定载荷(N)		重量(g)		
代码	规格 ^①																				动载荷Cr	静载荷Cor			
UCT...-FSB	201	UCT201	12																				790		
	202	UCT202	15										94		21	61	31	12.7			12800	6650	780		
	203	UCT203	17		10	51	32	19	51		76	89		32									760		
	204	UCT204	20	16						12											0.6		740		
	205	UCT205	25										97		24	62	34	14.3	±0.5			14000	7880	830	
	206	UCT206	30			56		22	57		89	102	113	37	28	70	38.1	15.9				19500	11200	1300	
	207	UCT207	35		13	64			64				129		30	78	42.9	17.5				25700	15200	1600	
	208	UCT208	40										114			33	88					0.8	29600	18200	2400
	209	UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19				31850	20800		
	210	UCT210	50							86			149		37	90	51.6					35100	23200		

铸造型-标准型

代码	类型	材质	
		轴承座	轴承
UCT...-TR	标准型	HT200灰铸铁	轴承钢

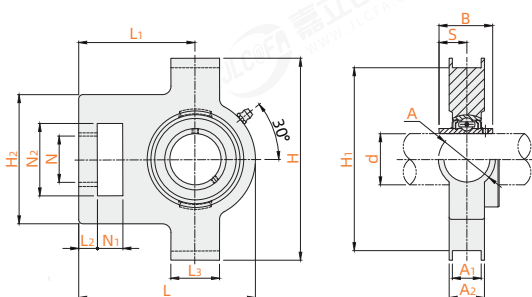

精度: JIS B 1558
JIS B 1514
JIS B 1559
(GB/T 7809-1995)



视角标准: 第一视角

型号		国标型号	d	N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A	A ₂	L ₁	B	S	安装孔 尺寸(Δ) 公差	安装孔 位置度 偏差x	基本额定载荷(N)		重量 (g)
代码	规格 ①																				动载荷Cr	静载荷Cor	
UCT....-TR	201	UCT201S	12																				
	202	UCT202S	15	15	9	46	31	18	46		70	82	88	30	21	58	27.4	11.5			12800	6650	700
	203	UCT203S	17																				
	204	UCT204	20		10	51	32	19	51	12	76	89	94	32		61	31	12.7		0.6			790
	205	UCT205	25										97		24	62	34	14.3			14000	7880	880
	206	UCT206	30	16		56	37	22	57		89	102	113	37	28	70	38.1	15.9	±0.5		19500	11200	1300
	207	UCT207	35		13	64			64				129		30	78	42.9	17.5			25700	15200	1700
	208	UCT208	40												33	88					29600	18200	
	209	UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19		0.8	31850	20800	2500
	210	UCT210	50						86				149		37	90	51.6				35100	23200	2600