


BCTQ - 693

订货引导
请参考系列代码来选择型式和参数进行订购。

代码	材质			推荐使用温度
	套圈	保持架	球体	
BCTQ	POM	PA66	碳酸钠玻璃	-60°C~100°C

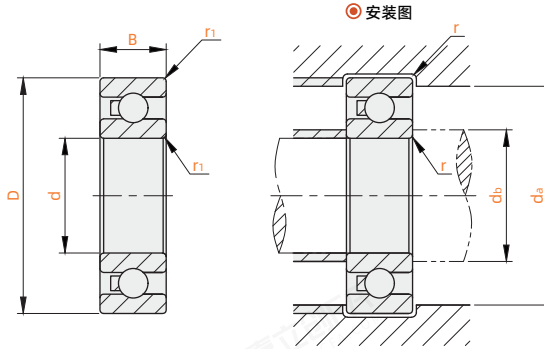

视角标准：第一视角

代码	型号	轴承规格①	d	D	B	r1	安装尺寸			重量g(参考)
							db(Min.)	da(Max.)	r(Max.)	
BCTQ	693	3	8			0.15	4.2	6.8	0.15	0.1
	694	4	11	4			5.2	9.8		0.3
	695	5	13			0.2	6.6	11.4	0.2	0.5
	696	6	15		5		7.6	13.4		0.7
	697	7	17				9	15		1
	698	8	19		6		10	17		1.4
	699	9	20			0.3	11	18	0.3	1.6
	6800		19	5				17		1
	6900	10	22	6			12	20		1.7
	6000		26	8				24		3.5
	6200		30	9		0.6		26	0.6	6
	6801		21	5				19		1.2
	6901	12	24	6		0.3	14	22	0.3	1.9
	6001		28	8				26		4
	6201		32	10		0.6	16	28	0.6	7
	6802		24	5				22		1.3
	6902	15	28	7		0.3	17	26	0.3	3
	6002		32	9				30		6
	6202		35	11		0.6		31	0.6	9
	6803		26	5				24		1.3
	6903	17	30	7		0.3	19	28	0.3	3.3
	6003		35	10				33		8
	6203		40	12		0.6	21	36	0.6	13
	6804		32	7		0.3		30	0.3	3
	6904	20	37	9			22	35		57
	6004		42	12		0.6		38	0.6	13
	6204		47	14		1	25	42	1	21
	6805		37	7				35		1
	6905	25	42	9		0.3	27	40	0.3	10
	6005		47	12		0.6	29	43	0.6	15
	6205		52	15		1	30	47	1	25
	6806		42	7		0.3		40	0.3	5
	6906	30	47	9			32	45		10
	6006		55	13		1	35	50	1	22
	6206		62	16				57		38
	6807		47	7		0.3	37	45	0.3	5
	6907	35	55	10		0.6	39	51	0.6	14
	6007		62	14		1	40	57	1	29
	6207		72	17		1.1	41.5	65.5		55
	6808		52	7		0.3	42	50	0.3	6
	6908	40	62	12		0.6	44	58	0.6	22
	6008		68	15		1	45	63		37
	6208		80	18		1.1	46.5	73.5	1	70
	6809		58	7		0.3	47	56	0.3	38
	6909	45	68	12		0.6	49	64	0.6	24
	6009		75	16		1	50	70	1	46
	6209		85	19		1.1	51.5	78.5		81
	6810		65	7		0.3	52	63	0.3	10
	6910	50	72	12		0.6	54	68	0.6	26
	6010		80	16		1	55	75		50
	6210		90	20		1.1	56.5	83.5	1	88

轴承-关节轴承
轴承随动器