




订货引导
C XG Y - 1 - D56 - d14 - e14
(大类别) (系列) (膜片) (2) 外径 (3) 内径 (4) 内径
请参考系列代码来选择型式和参数进行订购。

代码	类型	轴锁紧方式	膜片①	材质		表面处理	附件
				主体	膜片		
CXGY-1	标准型高扭矩	双侧免键型	单膜片	S45C	不锈钢	发黑	外六角螺栓
CXGY-2	高速膜片免键式		双膜片				

单膜片
CXGY-1

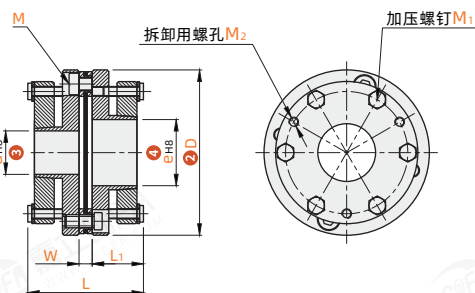

双膜片
CXGY-2

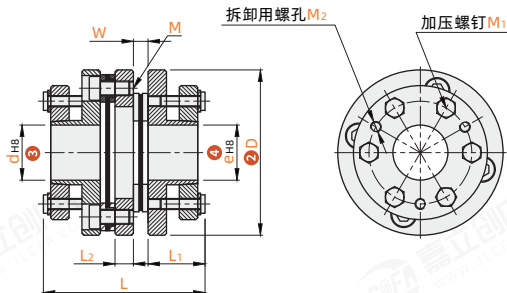

视角标准：第一视角

型号		③ d, e ④ 选择(但dse)																											
代码	D ②																												
单膜片 CXGY-1	56	14	16	18	19	20	22	24																					
	70				18	19	20	22	24	25	28	30	32	35															
	70L				18	19	20	22	24	25	28	30	32	35															
	80				18	19	20	22	24	25	28	30	32	35															
	80L				18	19	20	22	24	25	28	30	32	35															
	90						20	22	24	25	28	30	32	35	38	40	42	45	48										
	90L						20	22	24	25	28	30	32	35	38	40	42	45	48										
	100									24	25	28	30	32	35	38	40	42	45	48	50	52	55	60					
	100L									24	25	28	30	32	35	38	40	42	45	48	50	52	55	60					
	双膜片 CXGY-2	126											28	30	32	35	38	40	42	45	48	50	52	55	60	62	65		
126L												28	30	32	35	38	40	42	45	48	50	52	55	60	62	65			
144															32	35	38	40	42	45	48	50	52	55	60	62	65	70	75
144L															32	35	38	40	42	45	48	50	52	55	60	62	65	70	75

型号	代码	D②	L	L1	L2	W	M	M1	M2	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m²)	静态扭转刚性 (N·m/rad)	径向(mm)	角向(°)	轴向(mm)	重量 (g)
单膜片 CXGY-1	56	65	29			7	M5	M5	M5	50	100	18000	0.42×10 ⁻³	41×10 ³				680
	70	65	29				M6			70	140	17000	0.65×10 ⁻³	58×10 ³				904
	70L	90	41.5										0.75×10 ⁻³	67×10 ³				1250
	80	70	31										1×10 ⁻³	62×10 ³				1178
	80L	95	43.5			8				125	250	16000	1.15×10 ⁻³	71×10 ³				1550
	90	70	31				M8	M6	M6	180	360	14000	2×10 ⁻³	140×10 ³	0.02	0.5	±0.5	1943
	90L	110	50.5	-		8							2.3×10 ⁻³	160×10 ³				2100
	100	70	31			10				280	560	12000	2.95×10 ⁻³	160×10 ³				1946.5
	100L	124	57										3.39×10 ⁻³	184×10 ³				2250
	126	100	44.5			11	M10			450	900	10000	6.35×10 ⁻³	450×10 ³				4042
双膜片 CXGY-2	126L	152	70.5										7.3×10 ⁻³	517×10 ³				4500
	144	118	53			12	M12	M8	M8	760	1520	8000	11.33×10 ⁻³	785×10 ³				4502
	144L	170	79										13×10 ⁻³	902×10 ³				8039
	56	80	29				M5	M5	M5	50	100	15000	0.61×10 ⁻³	22×10 ³	0.02			780
	70	80	29			8	M6			70	140	13000	0.81×10 ⁻³	30×10 ³				2902.5
	70L	105	41.5										0.93×10 ⁻³	34×10 ³				1580.5
	80	88	31							125	250	11000	1.32×10 ⁻³	32×10 ³				1503.5
	80L	113	43.5			8							1.52×10 ⁻³	37×10 ³				1730
	90	88	31				M8	M6	M6	180	360	10000	2.56×10 ⁻³	68×10 ³				2408.5
	90L	129	50.5			8							2.95×10 ⁻³	78×10 ³		1	±1	2300
双膜片 CXGY-2	100	88	31			10				280	560	8000	3.68×10 ⁻³	79×10 ³	0.03			2471.5
	100L	144	57										4.23×10 ⁻³	91×10 ³				2550
	126	125	44.5			11	M10			450	900	10000	7.95×10 ⁻³	216×10 ³				5238.5
	126L	177	70.5										9.14×10 ⁻³	248×10 ³				5835
	144	144	53			12	M12	M8	M8	760	1520	8000	16.7×10 ⁻³	380×10 ³				6080.5
	144L	196	79										19.2×10 ⁻³	437×10 ³				9420

② 惯性力矩和重量为最大孔径计算。