


订货引导
请参考系列代码来选择型式和参数进行订购。

C XJ H - D - D15 - d3 - e3 - dh3.1 eh4.5
(大类别) (系列) (1 轴锁紧方式) (2 外径) (3 内径) (4 内径) (5 可选加工)

代码	类型	轴锁紧方式 ①	主体材质	表面处理	附件
CXJH-D	经济型螺纹线式	螺钉固定型	铝合金	阳极氧化	内六角紧定螺钉
CXJH-C	经济型螺纹线式	螺钉夹紧型	铝合金	阳极氧化	内六角圆柱头螺钉


螺钉固定型

CXJH-D




螺钉夹紧型

CXJH-C

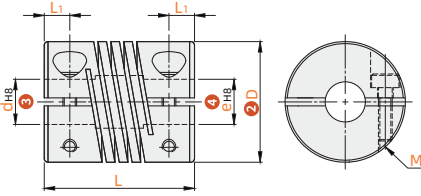

- 由于制作工艺原因，表面可能会有痕迹。
- 因偏心、偏角、轴向的位移如果出现多种偏差时，则各容许值会降低。



视角标准：第一视角

型号		③ d、e ④ 选择(但d≤e)																			
代码	D ②																				
螺钉固定型 CXJH-D	15.5	3	4	5	6																
	15.5L	3	4	5	6																
	17.5	3	4	5	6	6.35															
	19.1		4	5	6	6.35	7	8													
	25.4				6	6.35	7	8	9	9.525	10	11	12								
	28.6				6	6.35	7	8	9	9.525	10	11	12	12.7	13	14					
	38.1						8	9	9.525	10	11	12	12.7	13	14	15	16				
	50.8										10	11	12	12.7	13	14	15	16	17	18	19
螺钉夹紧型 CXJH-C	19	3	4	5	6	6.35	7	8													
	25			5	6	6.35	7	8	9	9.525	10	11	12								
	28.5				6	6.35	7	8	9	9.525	10	11	12	12.7	13	14					
	38						8	9	9.525	10	11	12	12.7	13	14	15	16				
	42										10	11	12	12.7	13	14	15	16	17	18	19
	50												12	12.7	13	14	15	16	17	18	19

型号		L	L1	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m²)	静态扭转刚度 (N·m/rad)	容许安装偏差			重量 (g)
代码	D ②										径向 (mm)	角向 (°)	轴向 (mm)	
螺钉固定型 CXJH-D	15.5	21	2.6			0.3	0.6		3.00×10 ⁻⁷	40				9
	15.5L	23	3.1	M3	0.7				3.20×10 ⁻⁷	40				10
	17.5					0.5	1.0	15000	6.10×10 ⁻⁷	70				12
	19.1	19.1	2.55			0.8	1.6		7.02×10 ⁻⁷	115	0.15	2	±0.15	13
	25.4	25.4	3.55	M4	1.7	1.8	3.6		2.87×10 ⁻⁶	175				30
	28.6	28.6	3.6			2.7	5.4	12000	5.16×10 ⁻⁶	265				37
	38.1	38.1	4.15	M5	4.0	6.3	12.6	10000	2.20×10 ⁻⁵	335				82
螺钉夹紧型 CXJH-C	50.8	50.8	5.25	M6	7.0	19.5	39	8000	9.38×10 ⁻⁵	565				180
	19	23	3.1	M2.5	1.0	0.8	1.6	10000	8.39×10 ⁻⁷	115				14
	25	32	4.1	M3	1.5	1.8	3.6		3.60×10 ⁻⁶	175				36
	28.5	38	5.0	M4	2.5	2.7	5.4	8000	6.87×10 ⁻⁶	265	0.15	2	±0.15	50
	38	41	5.9	M5	7.0	6.3	12.6		2.39×10 ⁻⁵	335				91
	42			M5	7.0	10.5	21		4.67×10 ⁻⁵	425				140
	50	50	6.7	M6	12.0	19.5	39	6000	9.38×10 ⁻⁵	565				180

⑤ 可选加工

代码 ⑤	可选图示	选型方法																																								
	变更 d/e 孔径	dh3.1 eh4.5 ● 最小单位 0.1 ● dh 须 ≤ eh ● 选型时须将 d(e) 变更为 dh(eh)																																								
dh() eh()		<table><tr><th colspan="2">CXJH-D</th><th colspan="2">CXJH-C</th></tr><tr><th>D</th><th>dh-eh</th><th>D</th><th>dh-eh</th></tr><tr><td>15.5</td><td>3~6</td><td>19</td><td>3~8</td></tr><tr><td>15.5L</td><td></td><td>25</td><td>5~12</td></tr><tr><td>17.5</td><td>3~6.35</td><td>28.5</td><td>6~14</td></tr><tr><td>19.1</td><td>4~8</td><td>38</td><td>8~17</td></tr><tr><td>25.4</td><td>6~12</td><td>42</td><td>10~19</td></tr><tr><td>28.6</td><td>6~14</td><td>50</td><td>12~19</td></tr><tr><td>38.1</td><td>8~16</td><td></td><td></td></tr><tr><td>50.8</td><td>10~19</td><td></td><td></td></tr></table>	CXJH-D		CXJH-C		D	dh-eh	D	dh-eh	15.5	3~6	19	3~8	15.5L		25	5~12	17.5	3~6.35	28.5	6~14	19.1	4~8	38	8~17	25.4	6~12	42	10~19	28.6	6~14	50	12~19	38.1	8~16			50.8	10~19		
CXJH-D		CXJH-C																																								
D	dh-eh	D	dh-eh																																							
15.5	3~6	19	3~8																																							
15.5L		25	5~12																																							
17.5	3~6.35	28.5	6~14																																							
19.1	4~8	38	8~17																																							
25.4	6~12	42	10~19																																							
28.6	6~14	50	12~19																																							
38.1	8~16																																									
50.8	10~19																																									