



C HL K - C2 - A20 - 1 - d4
 大类别 系列 2 公称直径 4 内径/轴承内径
 订货引导 类别 1 材质 3 皮带半径
 请参考系列代码来选择型式和参数进行订购。

代码	固定方式	形状	材质 ^①	表面处理
CHLK-C2	分离式夹紧	U槽型	S45C	发黑
CHLK-A1			A5052	本色阳极氧化

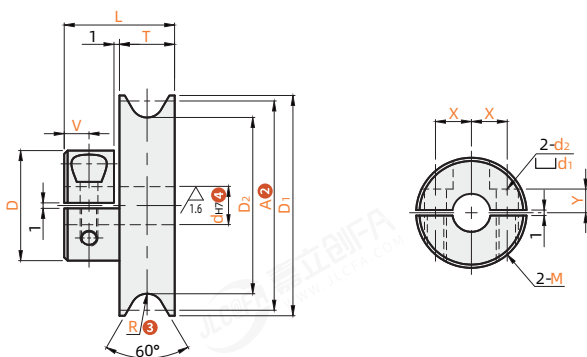

其余 $\sqrt{6.3}$

① M=M3时, $d_1=\varnothing 6.5$ $d_2=\varnothing 3.3$
 M=M4时, $d_1=\varnothing 8$ $d_2=\varnothing 4.3$



视角标准: 第一视角

型号	代码	A ^②	R ^③	d _{H7} 选择 ^④	D	D ₁	D ₂	L	T	V	X	Y	M	适用 皮带直径	
CHLK-C2 CHLK-A1	20		1	4 5	15.9	22	18				5	3	M3	2	
	30		1	4 5 6 6.35 8	19.9	32	28	11	5	2.5	7	3.5			
	40		1	4 5 6 6.35 8	19.9	42	38								
	30		1.5	4 5 6 6.35 8	19.9	32	27	16			7	3.5	M3	3	
	40		1.5	4 5 6 6.35 8	19.9	42	37								
	45		1.5	4 5 6 6.35 8 10 11 12	24.9	47	42	20		4.5	9	4.5			M4
	60		1.5	4 5 6 6.35 8 10 11 12	24.9	62	57								
	23					25	19								
	28			2	4 5 6 6.35 8	19.9	30	24	16		2.5	7	3.5	M3	
	30		2	4 5 6 6.35 8	19.9	32	26								
	40		2	4 5 6 6.35 8	19.9	42	36								
	45		2	4 5 6 6.35 8	19.9	47	41							M4	4
	48		2	4 5 6 6.35 8	19.9	50	44								
	60		2	4 5 6 6.35 8 10 11 12	24.9	62	56	20		4.5	9	4.5	M4		
	80		2	4 5 6 6.35 8	19.9	82	76								
	28			2.5	4 5 6 6.35 8	19.9	30	23	16		2.5	7	3.5	M3	
	40		2.5	4 5 6 6.35 8	19.9	42	35								
	48		2.5	4 5 6 6.35 8	19.9	50	43								
	50		2.5	4 5 6 6.35 8	19.9	52	45							M4	5
	60		2.5	4 5 6 6.35 8 10 11 12	24.9	62	55	20		4.5	9	4.5	M4		
	75		2.5	4 5 6 6.35 8	19.9	77	70								
	80		2.5	4 5 6 6.35 8	19.9	82	75								
	28			3	4 5 6 6.35 8	19.9	30	22	16		2.5	7	3.5	M3	
	38		3	4 5 6 6.35	19.9	40	32				6.5				
48		3	4 5 6 6.35	19.9	50	42									
50		3	4 5 6 6.35	19.9	52	44							M4	6	
58		3	4 5 6 6.35	19.9	60	52									
60		3	4 5 6 6.35 8 10 11 12	24.9	62	54	20		4.5	9	4.5	M4			
75		3	4 5 6 6.35 8	19.9	77	69									
95		3	4 5 6 6.35 8	19.9	97	89									
100		3	4 5 6 6.35 8	19.9	102	94									