



E DL H - S1 - M3 - L6
订货引导 (大类别) (系列) (类别) (1) 材质 (2) 公称直径 (3) 长度

请参考系列代码来选择型式和参数进行订购。

内六角平头带垫螺钉

代码	名称	材质①	表面处理	强度等级
EDLH-C16	内六角平头带垫螺钉	10B21(碳钢)	发黑	8.8
EDLH-S1		SUS304	-	A2-70

本产品适用标准: ISO 7380.2-2011

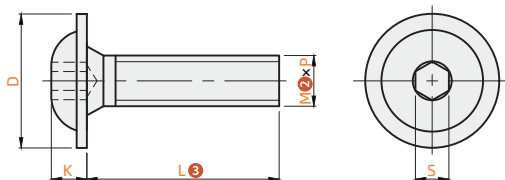



视角标准: 第一视角

型号		L ③										P 螺距	D	K	S
代码	M ②														
(10B21) EDLH-C16	3	6	8	10	12							0.5	7	1.65	2
	4	6	8	10	12	20	25					0.7	9.2	2.2	2.5
	5		8	10	12	20	25					0.8	11.4	2.75	3
	6		8	10	12	20	25	30	35	40		1.0	13.6	3.5	4
	8			10	12	16	20	25	30	35	40	1.25	17.8	4.4	5.14
型号		L ③										P 螺距	D	K	S
代码	M ②														
(SUS304) EDLH-S1	3	5	6	8	10	12	16	20	25			0.5	7	1.65	2
	4		6	8	10	12	16	20	25	30		0.7	9.2	2.2	2.5
	5			8	10	12	16	20	25	30		0.8	11.4	2.75	3
	6				10	12	14	16	20	25	30	1.0	13.6	3.5	4

内六角沉头螺钉

代码	名称	材质①	硬度	表面处理	强度等级
EDLJ-C16	内六角沉头螺钉	10B21(碳钢)	32~39HRC	发黑	10.9
EDLJ-S1		SUS304	-	-	A2-50

本产品适用标准: DIN 7991-1986

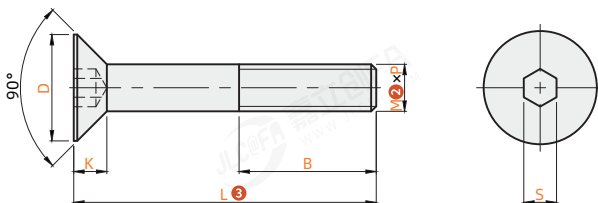

视角标准: 第一视角

型号		L ③													B	P螺距	D(min)	D(max)	K(max)	S		
代码	M ②																					
10B21 (碳钢) EDLJ-C16	2	3	4	5	6	8	10	12	16	20				全牙	0.4	3.7	4	1.3	1.3			
	3	6			8	10	12	16	20	25	30	35	40		45	50	0.5	5.7	6	1.7	2	
	4	6			8	10	12	16	20	25	30	35	40		45	50	0.7	7.64	8	2.3	2.5	
	5	6			8	10	12	14	16	20	25	30	35		40	45	50	0.8	9.64	10	2.8	3
	6	6			8	10	12	16	20	25	30	35	40		45	50	55	60	1	11.57	12	3.3
	8	10			12	16	20	25	30	35	40	45	50	55	60	全牙 半牙	1.25	15.57	16	4.4	5	
	16 20 25 30 35 40 45 50 55 60													65 70 75 80 85 90 100	全牙	1.5	19.487	20	5.5	6		
	10														65 70 75 80 90 100						半牙	
	20 25 30 35 40 45 50 55 60													65 70 75 80 90 100	半牙							
	12														65 70 75 80 90 100	半牙	1.75	23.48	24	6.5	8	
	16	30 35 40 45 50 55 60 65 70 75 80 90 100													全牙	2	29.48	30	7.5	10		
	20	40 45 50 55 60 65 70 75 80 90 100													全牙	2.5	35.38	36	8.5	12		

型号		L ③											B	P螺距	D(min)	D(max)	K(max)	S
代码	M②																	
(SUS304) EDLJ-S1	2.5	5	6	8	10									0.45	4.7	5	1.5	1.5
	3	6	8	10	12	16	20	25	30	35				0.5	5.7	6	1.7	2
	4	6	8	10	12	16	18	20	25	30	35			0.7	7.64	8	2.3	2.5
	5	8	10	12	14	16	20	25	30	35	40			0.8	9.64	10	2.8	3
	6	8	10	12	14	16	20	25	30	35	40	45		1	11.57	12	3.3	4
	8					16	20	25	30	35	40	45	50	1.25	15.57	16	4.4	5
	10					16	20	25	30					1.5	19.48	20	5.5	6