



**E DL Y - B - M2 - V2 - L4**  
 订货引导 (大类别) (系列) (1) 类型 (2) 公称直径 (3) 螺纹长度 (4) 长度  
 ⑥ 请参考系列代码来选择型式和参数进行订购。


**E DL Z - J2 - M3 - L3**  
 订货引导 (大类别) (系列) (5) 材质 (2) 公称直径 (4) 长度  
 ⑥ 请参考系列代码来选择型式和参数进行订购。


○ 不脱出型

| 代码      | 形状   | 类型   | 材质     | 强度等级  |
|---------|------|------|--------|-------|
| EDLY-B  | 不脱出型 | 标准型  | SUS304 | A2-70 |
| EDLY-B1 |      | 短头型  |        |       |
| EDLY-B2 |      | 超短头型 |        |       |

标准型  
EDLY-B

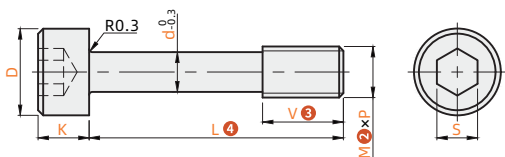


短头型  
EDLY-B1

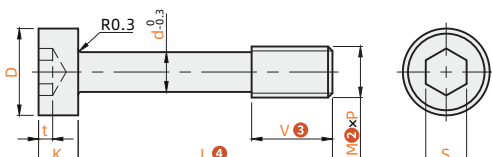

○ 超短头型

| 型号     | 代码 | M2  | V3 | L4                | P    | 螺距  | D   | S   | d | K |
|--------|----|-----|----|-------------------|------|-----|-----|-----|---|---|
| EDLY-B | 2  | 2.5 | 4  | 6 8 10 12 16      | 0.4  | 3.8 | 1.5 | 15  | 2 | 2 |
|        | 3  | 2   | 4  | 6 8 10 12 16      | 0.5  | 5.5 | 2.5 | 2.2 | 3 | 3 |
|        | 4  | 3   | 6  | 8 10 12 16 20     | 0.7  | 7   | 3   | 3   | 4 | 4 |
|        | 5  | 3   | 8  | 10 12 16 20       | 0.8  | 8.5 | 4   | 3.9 | 5 | 5 |
|        | 6  | 4   | 8  | 10 12 16 20 25    | 1    | 10  | 5   | 4.5 | 6 | 6 |
|        | 8  | 5   | 8  | 10 12 16 20       | 1.25 | 13  | 6   | 6.3 | 8 | 8 |
|        | 10 | 6   | 10 | 12 16 20 25 30 40 |      |     |     |     |   |   |
|        |    |     |    |                   |      |     |     |     |   |   |
|        |    |     |    |                   |      |     |     |     |   |   |
|        |    |     |    |                   |      |     |     |     |   |   |
|        |    |     |    |                   |      |     |     |     |   |   |
|        |    |     |    |                   |      |     |     |     |   |   |

超短头型  
EDLY-B2

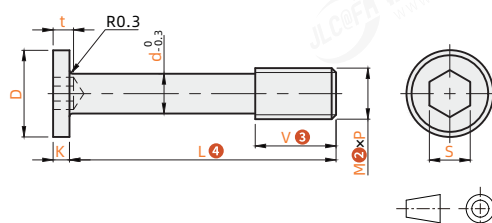

视角标准：第一视角

○ 短头型

| 型号      | 代码 | M2 | V3  | L4          | P   | 螺距  | D   | K   | S   | d   | tmax |
|---------|----|----|-----|-------------|-----|-----|-----|-----|-----|-----|------|
| EDLY-B1 | 3  | 2  | 3.5 | 6 8 10 12   | 0.5 | 5.5 | 2   | 2   | 2.2 | 1.5 | 1.5  |
|         | 4  | 3  | 6   | 8 10 12 16  | 0.7 | 7   | 2.8 | 2.5 | 3   | 2.3 | 2.3  |
|         | 5  | 4  | 8   | 10 12 16 20 | 0.8 | 8.5 | 3.5 | 3   | 3.9 | 2.7 | 2.7  |
|         | 6  | 5  | 10  | 12 16 20 25 | 1   | 10  | 4   | 4   | 4.5 | 3   | 3    |
|         | 8  | 6  | 12  | 16 20 25 30 |     |     |     |     |     |     |      |
|         |    |    |     |             |     |     |     |     |     |     |      |
|         |    |    |     |             |     |     |     |     |     |     |      |
|         |    |    |     |             |     |     |     |     |     |     |      |
|         |    |    |     |             |     |     |     |     |     |     |      |
|         |    |    |     |             |     |     |     |     |     |     |      |
|         |    |    |     |             |     |     |     |     |     |     |      |
|         |    |    |     |             |     |     |     |     |     |     |      |



○ 超短头型

| 型号      | 代码 | M2 | V3  | L4       | P   | 螺距 | D   | K   | S   | d | tmax |
|---------|----|----|-----|----------|-----|----|-----|-----|-----|---|------|
| EDLY-B2 | 3  | 2  | 3.5 | 5 6 8 10 | 0.5 | 6  | 1.3 | 1.5 | 2.2 | 2 | 2    |
|         | 4  | 3  | 6   | 8 10 12  | 0.7 | 8  |     |     |     |   |      |
|         | 5  | 4  | 8   | 10 12 16 | 0.8 | 9  | 1.5 | 3   | 3.9 | 3 | 3    |
|         | 6  | 5  | 10  | 12 16 20 | 1   | 10 |     |     |     |   |      |
|         | 8  | 6  | 12  | 16 20 25 |     |    |     |     |     |   |      |
|         |    |    |     |          |     |    |     |     |     |   |      |
|         |    |    |     |          |     |    |     |     |     |   |      |
|         |    |    |     |          |     |    |     |     |     |   |      |
|         |    |    |     |          |     |    |     |     |     |   |      |
|         |    |    |     |          |     |    |     |     |     |   |      |
|         |    |    |     |          |     |    |     |     |     |   |      |
|         |    |    |     |          |     |    |     |     |     |   |      |

○ 超短头型

| 代码      | 类型   | 全牙/半牙 | 材质     | 硬度       | 表面处理 | 强度等级 |
|---------|------|-------|--------|----------|------|------|
| EDLZ-J2 | 超短头型 | 全牙    | SCM435 | 32~39HRC | 发黑   | 10.9 |
| EDLZ-S1 |      |       | SUS304 | -        | -    | -    |

特点：可以直接使用在以往会被六角螺栓阻碍到的地方。

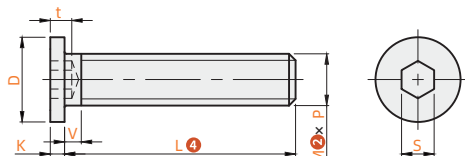

○ SCM435

| 型号      | 代码  | M2 | L4            | P    | 螺距 | D   | K   | S   | t   | V   |
|---------|-----|----|---------------|------|----|-----|-----|-----|-----|-----|
| EDLZ-J2 | 2   | 3  | 4 5 6 8 10 12 | 0.4  | 4  | 1.1 | 1.3 | 1.2 | 1.2 | 1.2 |
|         | 2.5 | 3  | 4 5 6 8 10 12 | 0.45 | 5  | 1.3 | 1.3 | 1.5 | 1.5 | 1.5 |
|         | 3   | 4  | 6 8 10        | 0.5  | 6  | 1.3 | 1.5 | 2   | 1.6 | 1.6 |
|         | 4   | 5  | 8 10          | 0.7  | 8  | 1.5 | 2   | 2.5 | 1.6 | 1.6 |
|         | 5   | 6  | 10 12 16 20   | 0.8  | 9  | 1.5 | 3   | 3   | 1.6 | 1.6 |
|         | 6   | 8  | 12 16 20 25   | 1.0  | 10 | 1.5 | 4   | 4   | 2.0 | 2.0 |
|         | 8   | 10 | 16 20 25 30   | 1.25 | 13 | 1.5 | 4   | 5   | 2.5 | 2.5 |
|         | 10  | 12 | 20 25 30      | 1.5  | 16 | 1.5 | 5   | 5   | 3   | 3   |
|         |     |    |               |      |    |     |     |     |     |     |
|         |     |    |               |      |    |     |     |     |     |     |

○ SUS304

| 型号      | 代码  | M2 | L4                     | P    | 螺距 | D   | K (Max) | S   | t   | V   |
|---------|-----|----|------------------------|------|----|-----|---------|-----|-----|-----|
| EDLZ-S1 | 2   | 3  | 4 5 6 8 10 12          | 0.4  | 4  | 1.5 | 1.3     | 1.2 | 1.2 | 1.2 |
|         | 2.5 | 3  | 4 5 6 8 10             | 0.45 | 5  | 1.5 | 1.3     | 1.5 | 1.5 | 1.5 |
|         | 3   | 4  | 5 6 8 10 12 14 16      | 0.5  | 6  | 1.5 | 1.5     | 2   | 1.6 | 1.6 |
|         | 4   | 5  | 6 8 10 12 14 16 18 20  | 0.7  | 8  | 1.5 | 2       | 2.5 | 1.6 | 1.6 |
|         | 5   | 6  | 8 10 12 14 16 18 20 25 | 0.8  | 9  | 1.5 | 3       | 3   | 1.6 | 1.6 |
|         | 6   | 8  | 12 14 16 18 20 25 30   | 1.0  | 10 | 1.5 | 3       | 4   | 2.0 | 2.0 |
|         | 8   | 10 | 16 18 20 25 30         | 1.25 | 13 | 1.5 | 4       | 5   | 2.5 | 2.5 |
|         | 10  | 12 | 20 25 30               | 1.5  | 15 | 1.5 | 5       | 5   | 3   | 3   |
|         |     |    |                        |      |    |     |         |     |     |     |
|         |     |    |                        |      |    |     |         |     |     |     |

视角标准：第一视角