


订货引导
G P J L - M3 - 0.5
类别 系列 1 螺纹大小 2 螺距
请参考系列代码来选择型式和参数进行订购。

内螺纹


代码	特征	气缸侧连接方式	材质	表面处理	表面硬度
GPJL	气缸连接件	内螺纹	S45C	镀硬铬	750HV~

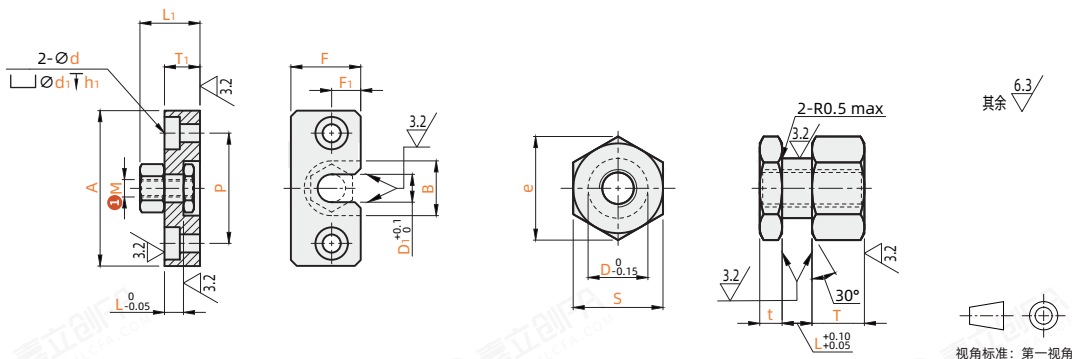

型号			气缸连接件							固定座										
代码	M①	螺距②	L	D	T	t	S	e	D ₁	B	T ₁	A	F	F ₁	P	d	d ₁	h ₁	L ₁	
GPJL	3	0.5	4	6	5		8	9.2	6.5	12	8	34	13	5	24	4.5	8.0	4.4	13	
	4	0.7		7	6	3	10	11.5	8	14		36	15	6	26				14	
	5	0.8		8	7		12	13.9	9	17	10	42	18	7	30	5.5	9.5	5.4	17	
	6	1.0	6	10	8		14	16.2	11	19	11	44	20	8	32				19	
	8	1.25	8	13	9	4	17	19.6	14	23	13	52	24	10	38	6.6	11.0	6.5	22	
	10			16	11			21	24.2	18	28	13	56	30	12					42
	14	1.5	12	21	13		26	30.0	23	34	17	70	36	15	52	9	14.0	8.6	30	
	18		15	25	15	5	30	34.6	27	38	21	84	43	19	62	11	17.0	10.5	36	

外螺纹

代码	气缸侧连接方式	材质	表面处理	表面硬度
GPJT	外螺纹	S45C	镀硬铬	HRC10~

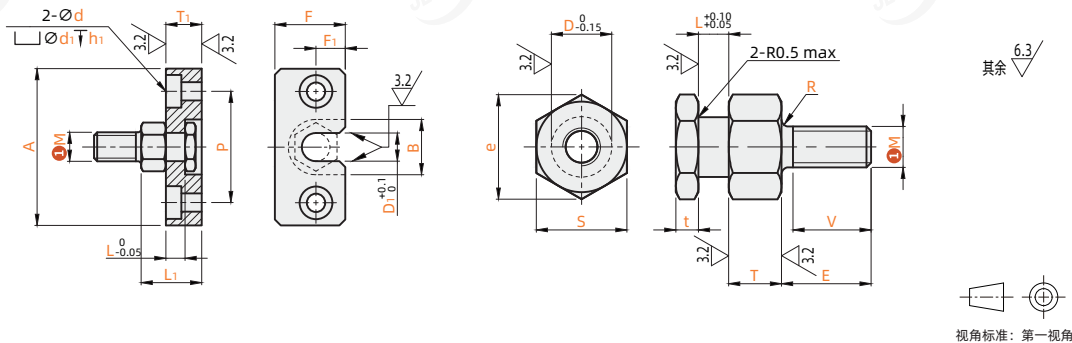

型号			气缸连接件										固定座									
代码	M①	螺距②	L	D	T	t	E	V	S	e	R	D ₁	B	T ₁	A	F	F ₁	P	d	d ₁	h ₁	L ₁
GPJT	3	0.5		4	4		8	6	6	6.9		4.5	9		30	10	4	20				12
	4	0.7	4		5	3	11	9			1.0			8					4.5	8.0	4.4	13
	5	0.8		6			13	11	8	9.2		6.5	12		34	13	5	24				
	6	1.0		7	6		19	17	10	11.5	1.5	8	14		36	15	6	26				14
	8	1.25	6	10	8	4	20	18	14	16.2		11	19	11	44	20	8	32	5.5	9.5	5.4	19
	10	1.5	8	13	9		24	21	17	19.6	2.0	14	23	13	52	24	10	38	6.6	11.0	6.5	22