






- 特点:
- 短路保护;
 - 过载保护;
 - 隔离功能;
 - 故障断开明确指示;
 - 正面视窗以红色指示断路器故障动作。



型号 代码	内部 编码	极数	接线方式	额定电流 (A)	动作 曲线	电源 方式
A9F18401				1		
A9F18402				2		
A9F18403				3		
A9F18404				4		
A9F18406				6		
A9F18410				10		
A9F18416	18			16	C	
A9F18420				20		
A9F18425				25		
A9F18432				32		
A9F18440				40		
A9F18450				50		
A9F18463				63		
A9F19401	F	4P		1		AC交流
A9F19402				2		
A9F19403				3		
A9F19404				4		
A9F19406				6		
A9F19410				10		
A9F19416	19			16	D	
A9F19420				20		
A9F19425				25		
A9F19432				32		
A9F19440				40		
A9F19450				50		
A9F19463				63		

● 安装示例

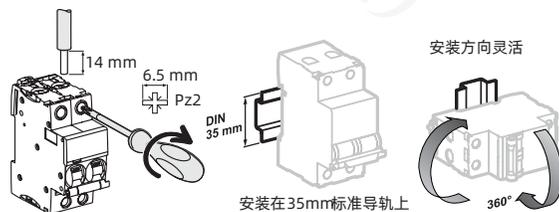


● 接线

螺丝尺寸	额定扭矩	极限扭矩	国家标准 额定扭矩	铜线	
				硬线	软线或箔线端子
6~25 A:M5	2.5Nm	5.1Nm	2Nm	1~25 mm ²	1~16 mm ²
32~63 A:M6.5	3.5Nm	5.6Nm	3.5Nm	1~35 mm ²	1~25 mm ²

● 动作曲线

动作曲线C和D, 符合IEC60898标准, 其瞬时磁脱扣动作范围如下:
 动作曲线C: (5-10) I_n
 动作曲线D: (10-14) I_n

● C曲线



● D曲线

