



- 主要功能: 过载、短路、隔离。
- 符合标准: GB/T10963.1, IEC60898-1。
- 符合认证: CCC, CE。
- 技术参数:
 - 额定电流: 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A;
 - 额定电压: 230V~(1P~2P, 1P+N), 400V~(2P~4P, 3P+N);
 - 频率: 50Hz;
 - 电磁脱扣器类型: C;
 - 极数: 1P+N, 2P, 3P, 3P+N, 4P;
 - 机械寿命: 20000次;
 - 电气寿命: 10000次;
 - 额定冲击耐受电压: 4kV。

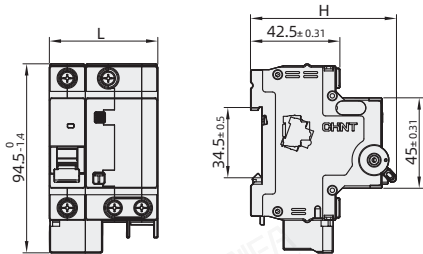

极数	1P+N	2P	3P	3P+N	4P
L(mm)	54	72	103.5	117	135
H(mm)	76.8	77.8	77.8	7.8	77.8



型号	额定电流(A)	极数	脱扣特性	分断能力	脱扣动作电流
NXBLE-63 1P+N C 10 30mA 6kA	10	1P+N	C	6KA	30MA
NXBLE-63 1P+N C 16 30mA 6kA	16				
NXBLE-63 1P+N C 20 30mA 6kA	20				
NXBLE-63 1P+N C 25 30mA 6kA	25				
NXBLE-63 1P+N C 32 30mA 6kA	32				
NXBLE-63 1P+N C 40 30mA 6kA	40				
NXBLE-63 1P+N C 50 30mA 6kA	50	2P			
NXBLE-63 1P+N C 63 30mA 6kA	63				
NXBLE-63 2P C 10 30mA 6kA	10				
NXBLE-63 2P C 16 30mA 6kA	16				
NXBLE-63 2P C 20 30mA 6kA	20				
NXBLE-63 2P C 25 30mA 6kA	25				
NXBLE-63 2P C 32 30mA 6kA	32	3P			
NXBLE-63 2P C 40 30mA 6kA	40				
NXBLE-63 2P C 50 30mA 6kA	50				
NXBLE-63 2P C 63 30mA 6kA	63				
NXBLE-63 3P C 10 30mA 6kA	10				
NXBLE-63 3P C 16 30mA 6kA	16				
NXBLE-63 3P C 20 30mA 6kA	20	3P+N			
NXBLE-63 3P C 25 30mA 6kA	25				
NXBLE-63 3P C 32 30mA 6kA	32				
NXBLE-63 3P C 40 30mA 6kA	40				
NXBLE-63 3P C 50 30mA 6kA	50				
NXBLE-63 3P C 63 30mA 6kA	63				
NXBLE-63 3P+N C 10 30mA 6kA	10	4P			
NXBLE-63 3P+N C 16 30mA 6kA	16				
NXBLE-63 3P+N C 20 30mA 6kA	20				
NXBLE-63 3P+N C 25 30mA 6kA	25				
NXBLE-63 3P+N C 32 30mA 6kA	32				
NXBLE-63 3P+N C 40 30mA 6kA	40				
NXBLE-63 3P+N C 50 30mA 6kA	50				
NXBLE-63 3P+N C 63 30mA 6kA	63				
NXBLE-63 4P C 10 30mA 6kA	10				
NXBLE-63 4P C 16 30mA 6kA	16				
NXBLE-63 4P C 20 30mA 6kA	20				
NXBLE-63 4P C 25 30mA 6kA	25				
NXBLE-63 4P C 32 30mA 6kA	32				
NXBLE-63 4P C 40 30mA 6kA	40				
NXBLE-63 4P C 50 30mA 6kA	50				
NXBLE-63 4P C 63 30mA 6kA	63				