


系列	适用引脚·触头	连接/接线方式	材质			防护等级
			外壳	绝缘体	接触体	
WF	中继公插头	金属螺纹锁紧	锌合金(镀铬)	热塑塑料PPS(耐高温260°C)	铜(镀金)	IP65

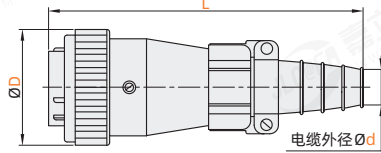


插座与面板 配合直径	16	20	24	28
ØD	21.5	26.4	29.8	34
L	72.3	86.9	92.5	100.6
Ød	7~8	8~10.5	8~10.5	11.5~13.6


单位:mm

○ 孔位排列图(从针的方向看)



WF16系列



WF20系列




WF24系列



视角标准: 第一视角

WF28系列



○ 技术参数

连接/接线方式	金属螺纹锁紧
接线方式	焊接: Ø1, Ø2.5, Ø3.5, Ø5.5
接触次数	500
温度范围	-40°C~+85°C
绝缘电阻	2000MΩ

代码	插座与面板 配合直径	芯数	接插件种类	接线方式	出线方式	适配插孔类型		
						直通母插头	面板安装方形母插座	面板安装螺母型母插座
WF16J2TI	16	2	插针	焊接	电缆护套	WF16K2ZIB	WF16K2Z	WF16K2ZM
WF16J3TI		3				WF16K3ZIB	WF16K3Z	WF16K3ZM
WF16J4TI		4				WF16K4ZIB	WF16K4Z	WF16K4ZM
WF16J5TI		5				WF16K5ZIB	WF16K5Z	WF16K5ZM
WF16J7TI		7				WF16K7ZIB	WF16K7Z	WF16K7ZM
WF16J9TI		9				WF16K9ZIB	WF16K9Z	WF16K9ZM
WF16J10TI		10				WF16K10ZIB	WF16K10Z	WF16K10ZM
WF20J2TI	20	2				WF20K2ZIB	WF20K2Z	WF20K2ZM
WF20J3TI		3				WF20K3ZIB	WF20K3Z	WF20K3ZM
WF20J4TI		4				WF20K4ZIB	WF20K4Z	WF20K4ZM
WF20J5TI		5				WF20K5ZIB	WF20K5Z	WF20K5ZM
WF20J7TI		7				WF20K7ZIB	WF20K7Z	WF20K7ZM
WF20J9TI		9				WF20K9ZIB	WF20K9Z	WF20K9ZM
WF20J12TI		12				WF20K12ZIB	WF20K12Z	WF20K12ZM
WF24J2TI	24	2				WF24K2ZIB	WF24K2Z	WF24K2ZM
WF24J3TI		3				WF24K3ZIB	WF24K3Z	WF24K3ZM
WF24J4TI		4				WF24K4ZIB	WF24K4Z	WF24K4ZM
WF24J9TI		9				WF24K9ZIB	WF24K9Z	WF24K9ZM
WF24J10TI		10				WF24K10ZIB	WF24K10Z	WF24K10ZM
WF24J12TI		12				WF24K12ZIB	WF24K12Z	WF24K12ZM
WF24J19TI		19				WF24K19ZIB	WF24K19Z	WF24K19ZM
WF28J3TI	28	3				WF28K3ZIB	WF28K3Z	WF28K3ZM
WF28J4TI		4				WF28K4ZIB	WF28K4Z	WF28K4ZM
WF28J7TI		7				WF28K7ZIB	WF28K7Z	WF28K7ZM
WF28J8TI		8				WF28K8ZIB	WF28K8Z	WF28K8ZM
WF28J10TI		10				WF28K10ZIB	WF28K10Z	WF28K10ZM
WF28J12TI		12				WF28K12ZIB	WF28K12Z	WF28K12ZM
WF28J16TI		16				WF28K16ZIB	WF28K16Z	WF28K16ZM
WF28J20TI		20				WF28K20ZIB	WF28K20Z	WF28K20ZM
WF28J24TI		24				WF28K24ZIB	WF28K24Z	WF28K24ZM
WF28J26TI		26				WF28K26ZIB	WF28K26Z	WF28K26ZM

○ 电气技术特性

WF16系列

芯数	2	3	4	5	7	9	10
额定电流(A)	10			5			
接触件直径	Ø1.5×2	Ø1.5×3	Ø1×4	Ø1×5	Ø1×7	Ø1×9	Ø1×10
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	2.5			5			
线规(mm²/AWG)	≤2/14			≤0.75/18			

WF20系列

芯数	2	3	4	5	7	9	12
额定电流(A)	25			10			5
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1.5×5	Ø1.5×7	Ø1×9	Ø1×12
工作电压(V)	500			400			100
耐压(V)	1500			1200			5
接触电阻(mΩ)	1			2.5			5
线规(mm²/AWG)	≤4/11			≤2/14			≤0.75/18

WF24系列

芯数	2	3	4	9	10	12	19
额定电流(A)	25			5,25	10		5
接触件直径	Ø2.5×2	Ø2.5×3	Ø2.5×4	Ø1×5, Ø2.5×4	Ø1.5×10	Ø1.5×12	Ø1×19
工作电压(V)	500			400			100
耐压(V)	1500			1200			5
接触电阻(mΩ)	1			5,1	2.5		5
线规(mm²/AWG)	≤4/11			≤0.75/18, ≤4/11	≤2/14		≤0.75/18

WF28系列

芯数	3	4	7	8	10	12	16	20	24	26
额定电流(A)	50			25	10			5		
接触件直径	Ø3.5×3	Ø2.5×4	Ø2.5×7	Ø2.5×8	Ø2.5×10	Ø1.5×12	Ø1.5×16	Ø1×20	Ø1×24	Ø1×26
工作电压(V)	500			400			1200			
耐压(V)	1500			1200			5			
接触电阻(mΩ)	0.5			1	2.5			5		
线规(mm²/AWG)	≤10/7			≤4/11	≤2/14			≤0.75/18		