

BCUJ - RB3010UCC0P5

BCUJ (大类别) RB3010 (系列)
J (类别)

订货引导




1 轴承规格

请参考系列代码来选择型式和参数进行订购。


代码	功能	后置代码	轴承游隙	轴承精度	本体材质
BCUJ	外圈分割型	UU(两端密封垫片)	CC0	P5	SUJ2

RB型

安装图




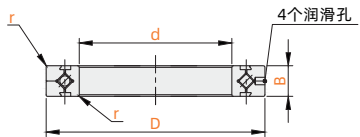


润滑孔的详细视图



RA型

安装图

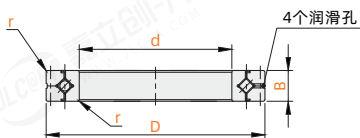

视角标准：第一视角

代码	型号	主要尺寸					润滑孔		肩部尺寸		基本额定负载(径向)		重量kg (参考)
		d	D	B	r(Min.)	a	b	ds(Max.)	Dh(Min.)	Cr(动)KN	Co(静)KN		
BCUJ	RB3010UCC0P5	30	55										0.12
	RB3510UCC0P5	35	60	10	0.6	2.5	1	41	51.5	7.64	9.12	0.13	
	RB4510UCC0P5	45	70					51	61.5	8.62	11.3	0.17	
	RA5008UCC0P5	50	66	8	0.5	2	0.8	53.5	60.5	5.1	7.19	0.08	
	RB5013UCC0P5		80	13	0.6	2.5	1.6	57	72	16.7	20.9	0.27	
	RA6008UCC0P5	60	76	8	0.5	2	0.8	63.5	70.5	5.68	8.68	0.09	
	RB6013UCC0P5		90	13	0.6	2.5	1.6	67	82	18	24.3	0.3	
	RA7008UCC0P5	70	86					73.5	80.5	5.98	9.8	0.1	
	RA8008UCC0P5		80	96	8	0.5	2	0.8	83.5	90.5	6.37	11.3	0.11
	RA9008UCC0P5	90	106					93.5	100.5	6.76	12.4	0.12	
	RB9016UCC0P5		130	16	1	3	1.6	98	118	31.4	45.3	0.75	
	RA10008UCC0P5	100	116	8	0.5	2	0.8	103.5	110.5	7.15	13.9	0.14	
	RB10016UCC0P5		140	16	1	3.5	1.6	109	129	31.7	48.6	0.83	
	RB10020UCC0P5	110	150	20				113	133	33.1	50.9	1.45	
	RA11008UCC0P5		126	8	0.5	2	0.8	113.5	120.5	7.45	15	0.15	
	RB11012UCC0P5	110	135	12	0.6	2.5	1	117	128	12.5	24.1	0.4	
	RB11015UCC0P5		145	15					119	136	23.7	41.5	0.75
	RB11020UCC0P5	120	160	20	1	3.5	1.6	120	143	34	54	1.56	
	RA12008UCC0P5		136	8	0.5	2	0.8	123.5	130.5	7.84	16.5	0.17	
	RB12016UCC0P5	120	150	16	0.6	3.5	1.6	127	141	24.2	43.2	0.72	
	RB12025UCC0P5		180	25	1.5	2	1.33	164	164	66.9	100	2.62	
	RA13008UCC0P5	130	146	8	0.5	2	0.8	133.5	140.5	7.94	17.6	0.18	
	RB13015UCC0P5		160	15	0.6	3.5	1.6	137	152	25	46.7	0.72	
	RB13025UCC0P5	140	190	25	1.5	2	0.8	143	174	69.5	107	2.82	
	RA14008UCC0P5		156	8	0.5	2	0.8	143.5	150.5	8.33	19.1	0.19	
	RB14016UCC0P5	140	175	16	1	2.5	1.6	147	162	25.9	50.1	1	
	RB14025UCC0P5		200	25	1.5	3.5	2	154	185	74.8	121	2.96	
	RA15008UCC0P5	150	166	8	0.5	2	0.8	153.5	160.5	8.82	20.6	0.2	
	RB15013UCC0P5		180	13	0.6	2.5	1.6	157	172	27	53.5	0.68	
	RB15025UCC0P5	160	210	25	1.5	3.5	2	164	194	76.8	128	3.16	
	RB15030UCC0P5		230	30				169	211	100	156	5.3	
	RA16013UCC0P5	160	186	13	0.8	2.5	1.6	165	179	23.3	44.9	0.59	
	RB16025UCC0P5		220	25	1.5	3.5	2	173	204	81.7	135	3.14	
	RA17013UCC0P5	170	196	13	0.8	2.5		175	189	23.5	46.5	0.64	
	RB17020UCC0P5		220	20	1.5	3.5	1.6	184	198	29	62.1	2.21	
	RA18013UCC0P5	180	206	13	0.8	2.5		185	199	24.5	49.8	0.68	
	RB18025UCC0P5		240	25	1.5	3.5	2	195	225	84	143	3.44	
	RA19013UCC0P5	190	216	13	0.8	2.5		195	209	24.9	51.5	0.69	
	RB19025UCC0P5		240	25	1	3.5	1.6	202	222	41.7	82.9	2.99	
	RA20013UCC0P5	200	226	13	0.8	2.5		205	219	25.8	54.7	0.71	
	RB20025UCC0P5		260	25				215	245	84.2	157	4	
	RB20030UCC0P5	200	280	30			4.5	3	221	258	114	200	6.7
	RB20035UCC0P5		295	35	2			225	270	151	252	9.6	
	RB22025UCC0P5	220	280				235	265	92.3	171	4.1		
	RB24025UCC0P5		240	300	25			256	281	68.3	145	4.5	
	RB25025UCC0P5	250	310				265	290	69.3	150	5		
	RB25030UCC0P5		330	30				269	306	126	244	8.1	
	RB25040UCC0P5	300	355	40			6	3.5	275	326	195	348	14.8
RB30025UCC0P5	360		25	2.5			3.5	2	315	340	76.3	178	5.9
RB30040UCC0P5	350	405	40			6	3.5	326	377	212	409	17.2	
RB35020UCC0P5		400	20				3.5	1.6	363	383	54.1	143	3.9
RB40035UCC0P5	400	480	35			5	3	422	459	156	370	14.5	
RB40040UCC0P5		510	40				6	3.5	428	479	241	531	23.5
RB45025UCC0P5	450	500				464	484	61.7	182	6.6			
RB50025UCC0P5		500	550	25	1	3.5	1.6	514	534	65.5	201	7.3	

1Kgf=9.81N

轴承-关节轴承
轴承-随动器